


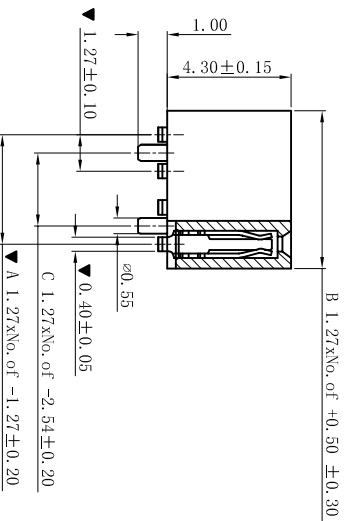



RoHS



With Out Peg



lonner Peg

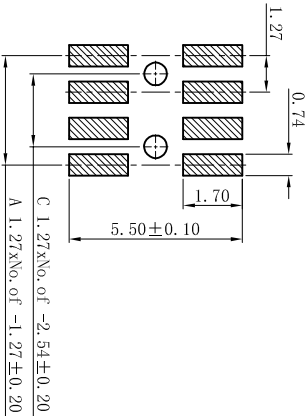

P. C. B. LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 125V AC, DC
 - Current rating: 1.0A, AC, DC
 - Withstanding Voltage: 300V AC/minute
 - Insulation resistance:1000Ω min
 - Temperature range: -40° C~+105° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W1270MSV-2xNP
 - Poles : 04-80P
 - Housing Material: PA6T 30%GF UL94V-0 Black
 - Ter Material: Phosphor Bronze
 - Contact Area Plating: Gold-Flash or Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

G										
	D	更新图面	2019-06-03	陈雄军						
	C	修订版本	2015-11-04	陈雄军						
	B	变更图宽格式内容	2013-12-27	陈雄军						
H	A	新版本	2011-05-24	陈雄军						
	版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.						
	1		2	3	4	5	6	7	8	9

一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .000±0.05 ANGLE. ±1°
绘图/DR	陈雄军	
审核/CHECK	陈雄军	
核准/APPRO	胡进	
日期/DATE	2019-06-03	
投影法 Projection	单位 Unit	品名 (PART NAME)
比例/Scale	大小/Size	料号 (PART NO)
页码/SHEET	版本/Rev	
D	D	
料号 (PART NO)		状态码
W1270MSV-2xNP		C

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO.,Ltd

PH1.27mm SMT 180° 立式 H4.3
Female Header Connector Series