RoHS

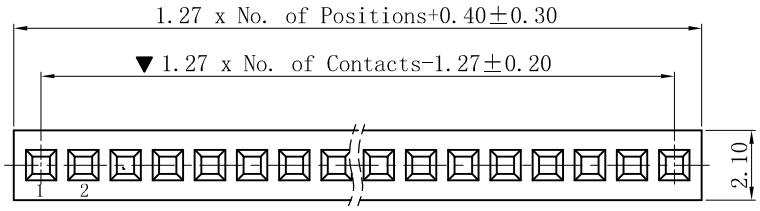

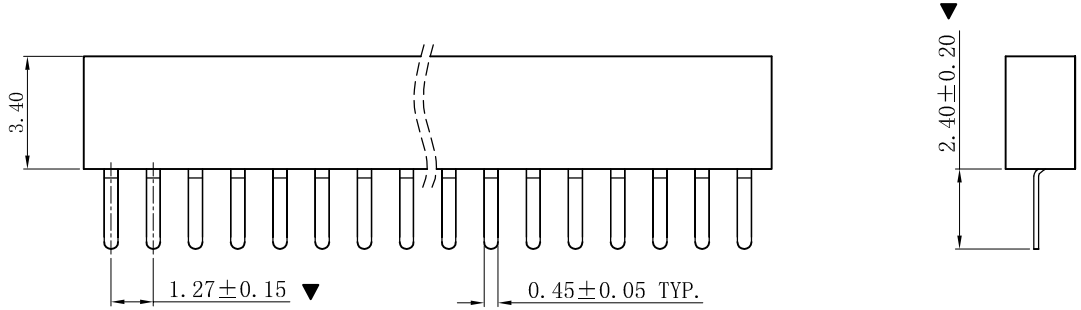

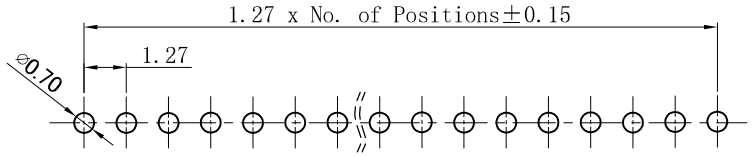

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Current rating: 1A, AC, DC
- Withstanding Voltage: 300V AC/minute
- Insulation resistance:500MΩ min at V=100V
- Temperature range: -40° C~+105° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W1270MV-1xNP
- Poles : 01-NP
- Housing Material: PA6T / PA9T / LCP+30%G.F or UL94V-0 Black.
- Pin Material: Phosphor Bronze
- Contact Area Plating: Tin-Plated or Gold-Plated
- The Dimension Marked "▼" Must Be Recorded

REV.	DESCRIPTION	DATE.	APPRO.
B	更新图面	2019-06-03	PH.Duan
A	新版本	2018-07-28	段平会

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2018-07-28

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection	
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	B

品 名 (PART NEME)	PH1.27mm 180° Female Header Connector Series
料 号 (PART NO)	W1270MV-1xNP
状态码	C