
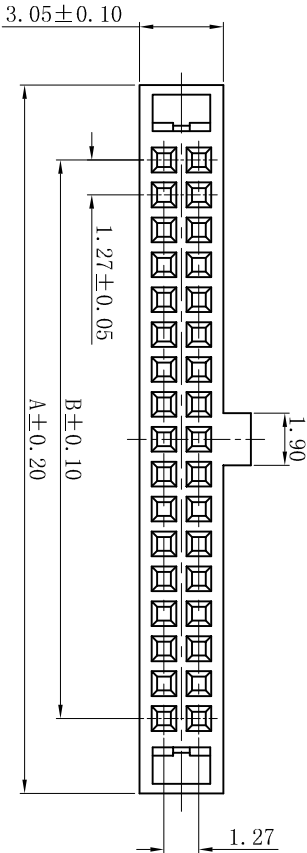

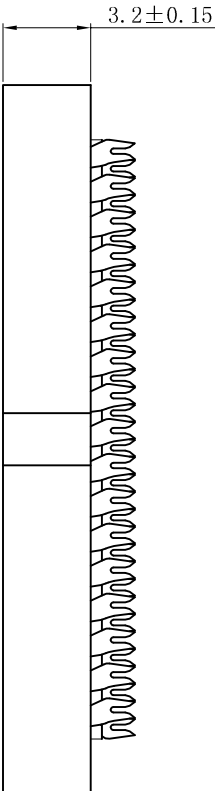
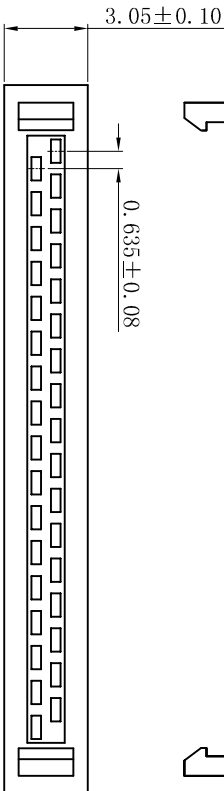



RoHS

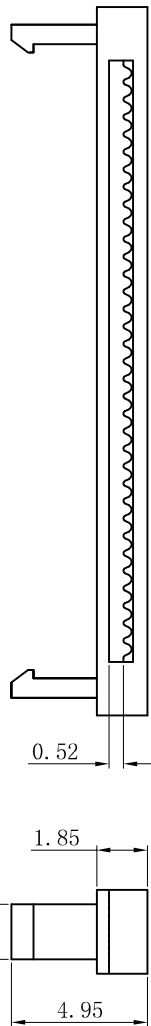

SPECIFICATIONS

- Voltage Rating: 250V AC, DC
- Current Rating: 1.0A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation Resistance:100M Ω min
- Temperature range: -25° C +85° C
- Contact resistance: 20m Ω max

WAFER

- Part No. : W1271IDC-NP
- Poles : 06-64P
- Material: PBT (UL94V-0)
- Pin Material: Phosphor Broze
- Contact Area Plating: Selective Gold Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		Poles		Dimensions (mm)	
	A	B			A	B
6	8.00	2.54	28		21.97	16.51
8	9.27	3.81	30		23.24	17.78
10	10.54	5.08	34		25.78	20.32
12	11.81	6.35	40		29.59	24.13
14	13.08	7.62	44		32.13	26.67
16	14.35	8.89	50		35.94	30.48
18	15.62	10.16	52		37.21	31.75
20	16.89	11.43	60		42.29	36.83
26	20.70	15.24	64		44.83	39.37

G					一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .000±0.05		ANGLE: ±1°	
	D	更新图面	2019-06-03	陈雄军	绘图/DR	陈雄军	审核/CHECK	陈雄军	胡进	2019-06-03
	C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军	审核/CHECK	陈雄军	胡进	2019-06-03
	B	变更图宽格式内容	2013-12-27	陈雄军	绘图/DR	陈雄军	审核/CHECK	陈雄军	胡进	2019-06-03
H	A	新版本	2011-05-24	陈雄军	绘图/DR	陈雄军	审核/CHECK	陈雄军	胡进	2019-06-03
	版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.	日期 DATE.	承认 APPRO.	日期 DATE.	承认 APPRO.	日期 DATE.	承认 APPRO.
1	2	3	4	5	6	7	8	9	10	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector s CO.,Ltd

投影法 Projection	单位 Unit	品名 (PART NAME)	IDC 1.27mm 180° Wafer
比例/Scale 1:1	大小/Size A4	料号 (PART NO)	W1271IDC-NP
页码/Sheet 1/1	版本/Rev D	状态码 C	