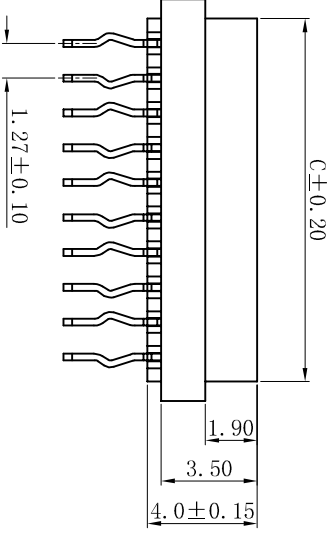
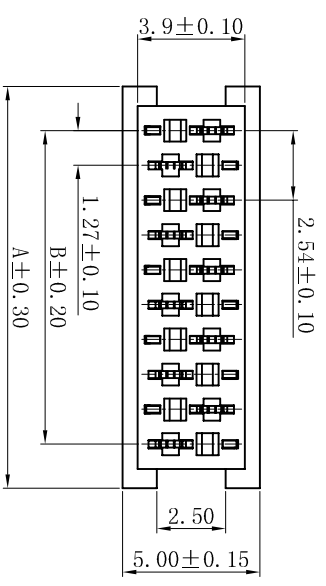


RECOMMENDED P.C.B LAYOUT (TOP SIDE)
(PCB BOARD TOLERANCE: ±0.05mm)

- SPECIFICATIONS
 - Voltage Rating: 125V AC, DC
 - Current Rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation Resistance: 100MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 10mΩ max
- WAFER
 - Part No. : W1271V-NP
 - Poles : 04-26P
 - Material : PA9T UL94V-0
 - Pin Material : Bronze
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

					—般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°		XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO.,Ltd		
					投影法 Projection 单位 Unit MM		品 名 (PART NAME) IDC 1.27mm 180° Wafer Connector Series		
					绘图/DR 审核/CHECK 核准/APPRO 日期/DATE		料 号 (PART NO) W1271V-NP		状态码 C
					2019-06-03				
					胡 进				
					陈雄军				
					2013-7-30				
					陈雄军				
					承认 APPRO.				
					日期 DATE.				
					说明 DESCRIPTION				
					版次 REV.				
					更新图面				
					新版本				
					2019-06-03				
					2013-7-30				
					陈雄军				
					承认 APPRO.				
					日期 DATE.				
					说明 DESCRIPTION				
					版次 REV.				