


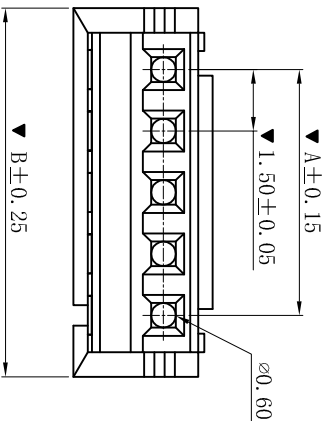





RoHS

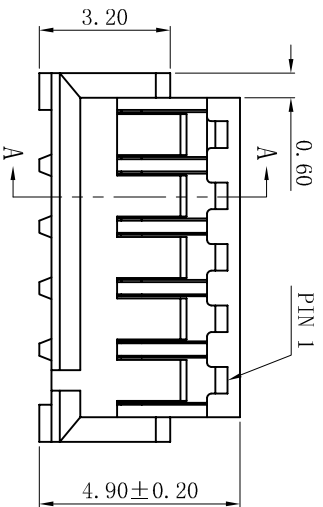

- SPECIFICATIONS
- Voltage Rating: 50V AC, DC
 - Current Rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation Resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : HI500-NP
 - Poles: 02-15P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

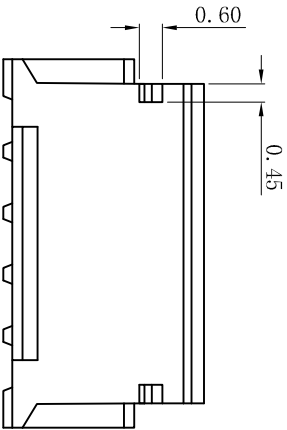

SECTION: A-A

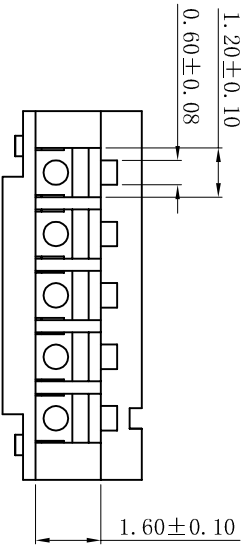

G

G

			更新图面			2019-06-03			陈雄军	
D			修订版本			2015-11-04			陈雄军	
C			变更图宽格式内容			2013-12-27			陈雄军	
B			新版本			2011-05-24			陈雄军	
A			说明			日期			承认	
版次			DESCRIPTION			DATE.			APPRO.	
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector s CO.,Ltd

投影法
Connectors
单位 Unit
比例/Scale
大小/Size
页码/Sheet
版本/Rev

品名
(PART NAME)
料号
(PART NO)
HI500-NP
状态码
C