
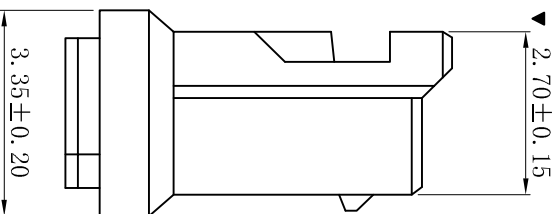
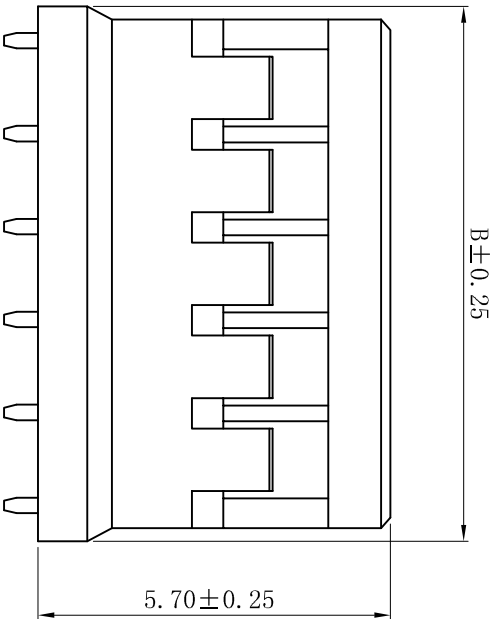


ROHS

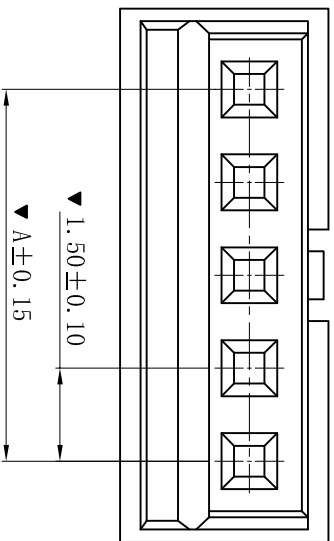

- SPECIFICATIONS
- Voltage rating: 350V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No.: H1502-NP
 - Poles : 02-15P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	1.50	4.10
03	3.00	5.60
04	4.50	7.10
05	6.00	8.60
06	7.50	10.10
07	9.00	11.60
08	10.50	13.10
09	12.00	14.60
10	13.50	16.10
11	15.00	17.60
12	16.50	19.10
13	18.00	20.60
14	19.50	22.10
15	21.00	23.60

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 ±0.25 .00±0.20 .000±0.05 ANGLE: ±1°	绘图/DR 审核/CHKC 批准/APPRO	日期/DATE	承认 APPRO.
C	修订版本	2015-11-04	陈雄军	Pro Draw	陈雄军	2019-06-03	
B	变更图宽格式内容	2013-12-27	陈雄军		胡连		
A	新版本	2011-05-24	陈雄军		胡连		
H	说明						
1	版次 REV.						

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors Co., Ltd

投影法
Projection
单位 Unit
MM
比例/Scale
1:1
大小/Size
A4
页码/SHEET
1/1
版本/Rev
D

品名
(PART NAME)
Molex 1.50mm Housing
Connector Series

料号
(PART NO)
H1502-NP

状态码
C