

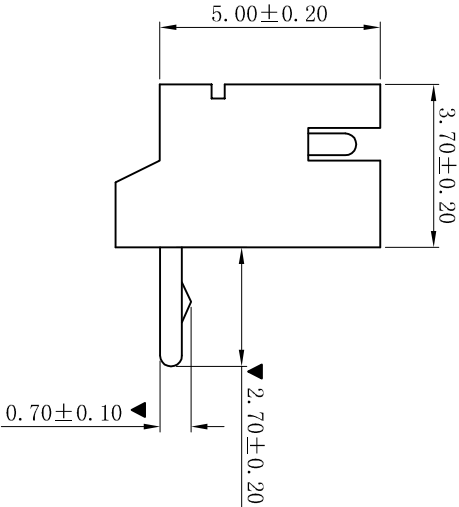
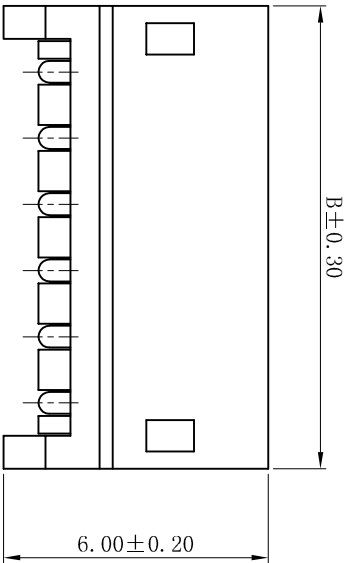


RoHS

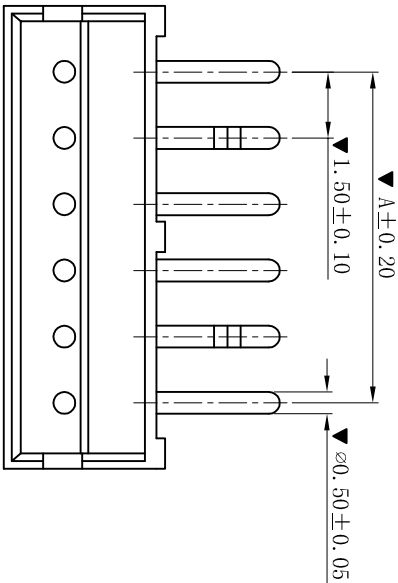

P. C. B LAYOUT
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage Rating: 50V AC, DC
 - Current Rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation Resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W1500R-NP
 - Poles : 02-13P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass /Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	1.50	4.50
03	3.00	6.00
04	4.50	7.50
05	6.00	9.00
06	7.50	10.50
07	9.00	12.00
08	10.50	13.50
09	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO.,Ltd										品 名 (PART NAME) ZHL. 50mm DIP 90° Wafer Connector Series		料 号 (PART NO) W1500R-NP		状态码 C			
投影法 Projection 										单位 Unit		MM					
										比例/Scale		1:1					
										大小/Size		A4					
										页码/Sheet		1/1					
版本/Rev										D							
一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°										绘图/DR		审核/CHECK		陈雄军			
												核准/APPRO		胡 进			
												日期/DATE		2019-06-03			
										C		修订版本					
										D		更新图面		2019-06-03		陈雄军	