



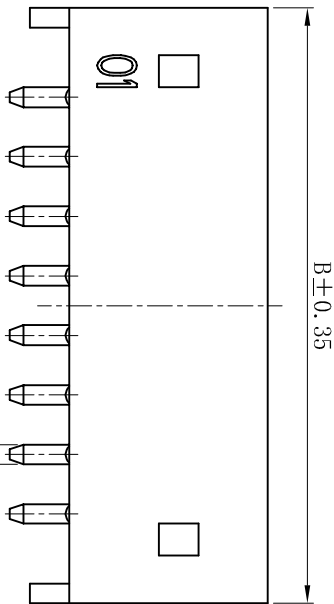



RoHS

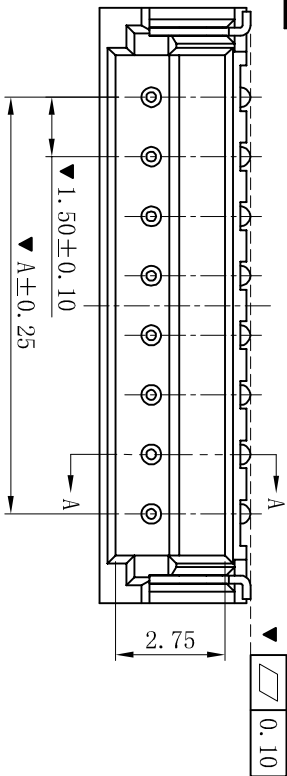

SECTION: A-A

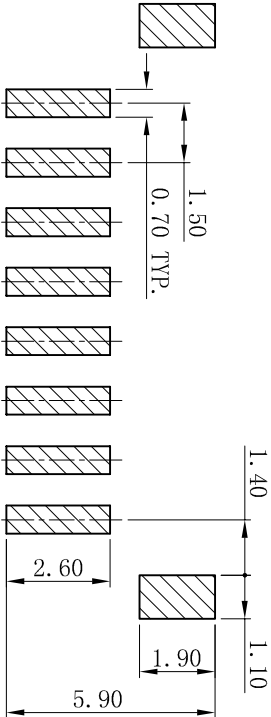

P.C.B. LAYOUT
TOLERANCE: ±0.05mm

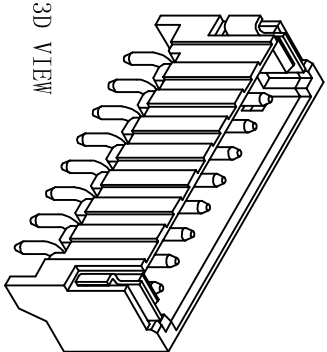

3D VIEW

SPECIFICATIONS

- Voltage Rating: 50V AC, DC
- Current Rating: 1.0A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation Resistance: 100M Ω min
- Temperature range: -25° C+85° C
- Contact resistance: 20m Ω max

WAFER

- Part No. : W1500SR-NP-K
- Poles : 02-16P
- Housing Material: PA9T UL94V-0
- Pin Material: Brass /Tin-Plated
- Solder Tab Material: Brass /tin-plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B

02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50
16	22.50	27.00

G									
	D	更新图面		2019-06-03	陈雄军				
	C	修订版本		2015-11-04	陈雄军				
	B	变更图宽格式内容		2013-12-27	陈雄军				
H	A	新版本		2011-05-24	陈雄军				
	版次	说明		日期	承认				
1	1	2	3	4	5	6	7	8	10

一般公差 GENERAL TOLERANCE:	0±0.30
	.0±0.25
ANGLE: ±1°	.00±0.20
	.000±0.05
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

XYZ® 东莞市祥运连接器有限公司		Connector s CO.,Ltd	
投影法		单位 Unit	
比例/Scale		大小/Size	
页码/SHEET		1/1	
版本/Rev		D	
品名		ZH1.50mm SMT 90° Wafer	
(PART NAME)		Connector Series	
料号		W1500SR-NP-K	
(PART NO)		状态码	
		C	