

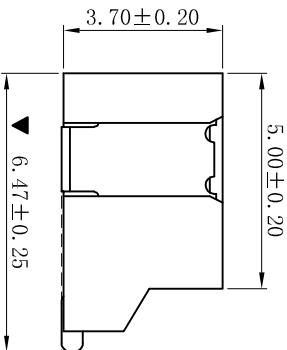


RoHS+HF

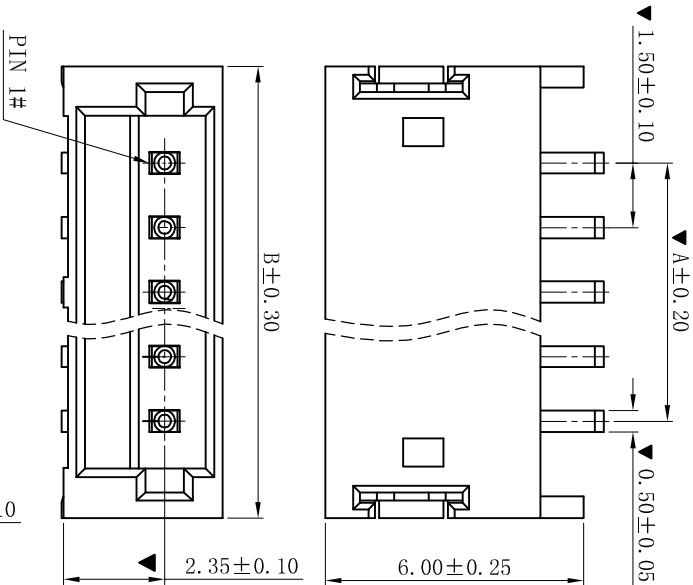

- SPECIFICATIONS
- Voltage Rating: 50V AC, DC
 - Current Rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation Resistance:100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 40mΩ max
- WAFER
- Part No. : W1500SR-NP-LP-HF
 - Poles : 02-15P
 - Housing Material: LCP UL94V-0 Halogen-Free
 - Pin Material: Brass /Matte Tin-Plated
 - Solder Tab Material: Brass /Matte Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

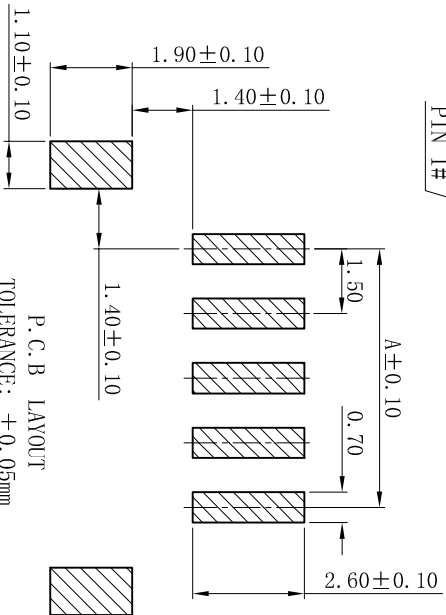

P.C.B LAYOUT
TOLERANCE: ±0.05mm

Poles	Dimension (mm)	
	A	B
02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50

D	更新图面	2019-06-03	陈雄军						
C	修订版本	2015-11-04	陈雄军						
B	变更图宽格式内容	2013-12-27	陈雄军						
A	新版本	2011-05-24	陈雄军						
版次	说明	日期	承认						
REV.	DESCRIPTION	DATE.	APPRO.						
1									
2									
3									
4									
5									
6									
7									
8									
9									
10									

一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR		陈雄军
审核/CHECK		陈雄军
批准/APPRO		胡进
日期/DATE		2019-06-03

XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connector s CO.,Ltd				投影法 Projection		品名 (PART NAME)		料号 (PART NO)	
				单位 Unit		大小/Size		页码/Sheet	
				MM		1:1		1/1	
						(PART NAME)		W1500SR-NP-LP-HF	
						Connector Series		状态码	
								C	