
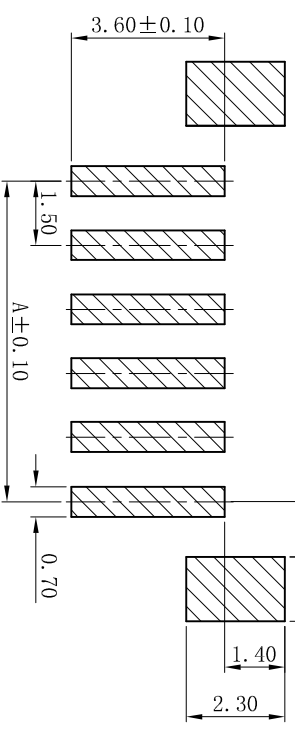
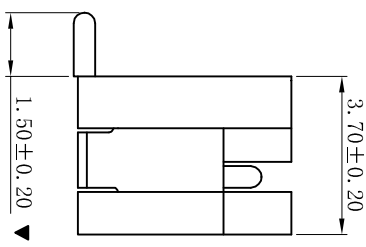
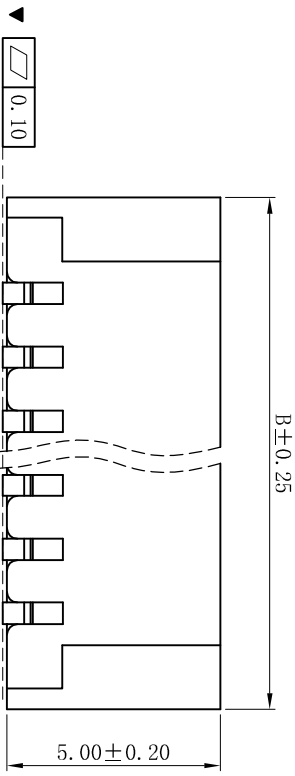


ROHS+HF

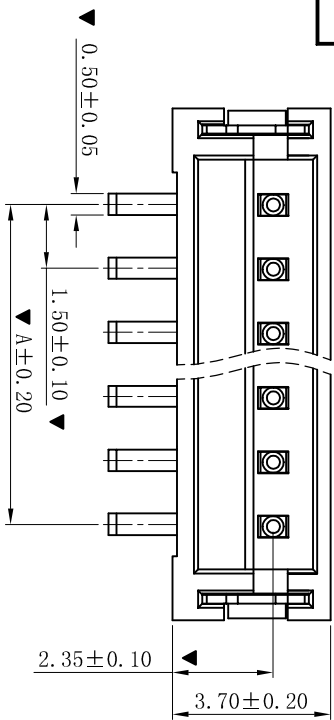

P.C.B LAYOUT
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage Rating: 50V AC, DC
- Current Rating: 1.0A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation Resistance: 100MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 40mΩ max

■ WAFER

- Part No. : W1500SV-NP-LP-HF
- Poles : 02-15P
- Housing Material: LCP UL94V-0 Halogen-Free
- Pin Material: Brass /Matte Tin-Plated
- Solder Tab Material: Brass /Matte Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50

D	更新图面	2019-06-03	陈雄军							
C	修订版本	2015-11-04	陈雄军							
B	变更图宽格式内容	2013-12-27	陈雄军							
A	新版本	2011-05-24	陈雄军							
H	说明	日期	承认							
1	版次	REV.	APPRO.							
1	1	2	3	4	5	6	7	8	9	10

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE:	±1°
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/SHEET: 1/1
版本/Rev: D

品名 (PART NAME): ZH1.50mm SMT 180° Wafer
料号 (PART NO): W1500SV-NP-LP-HF
连接器系列 Connector Series

状态码: C