
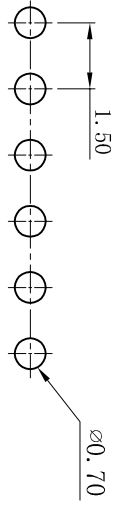
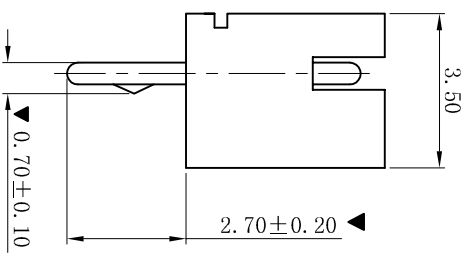
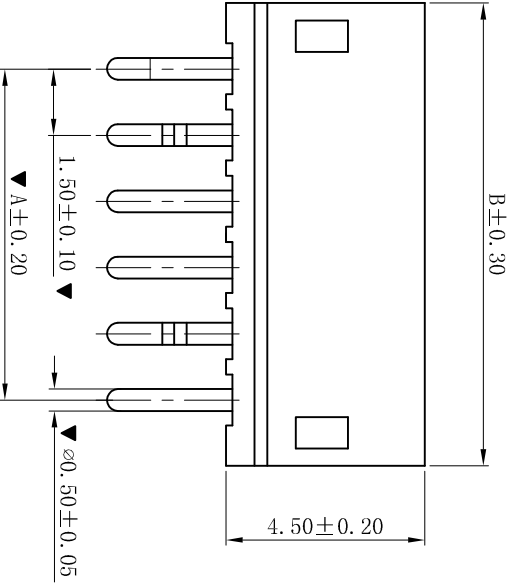


ROHS

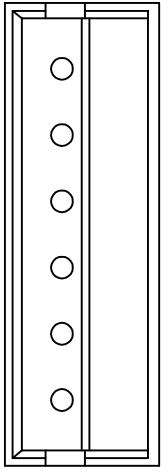

P. C. B. LAYOUT
TOLERANCE: ±0.05mm

- SPECIFICATIONS**
- Voltage Rating: 50V AC, DC
 - Current Rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation Resistance: 100MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W1500V-NP
 - Poles : 02-13P
 - Housing Material : PA66 UL94V-0
 - Pin Material : Brass /Tin-Plated
 - The Dimension Marked “∇” Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	1.50	4.50
03	3.00	6.00
04	4.50	7.50
05	6.00	9.00
06	7.50	10.50
07	9.00	12.00
08	10.50	13.50
09	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector s CO., Ltd

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.05 ANGLE: ±1°	0±0.30 .0±0.25 .000±0.05 ANGLE: ±1°
修订版本		2015-11-04	陈雄军	绘图/DR	陈雄军
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK	胡进
新版本		2011-05-24	陈雄军	批准/APPRO	胡进
说明		日期	承认	日期/DATE	2019-06-03
版次		DESCRIPTION	APPRO.	日期/DATE	2019-06-03
REV.		1		日期/DATE	2019-06-03

投影法 Projection	单位 Unit	比例/Scale	大小/Size	页码/SHEET	版本/Rev
第一角法	MM	1:1	A4	1/1	D
品名 (PART NAME)		料号 (PART NO)			
ZH1.50mm DIP 180° Wafer		W1500V-NP			
Connector Series		状态码			
		C			