



RoHS

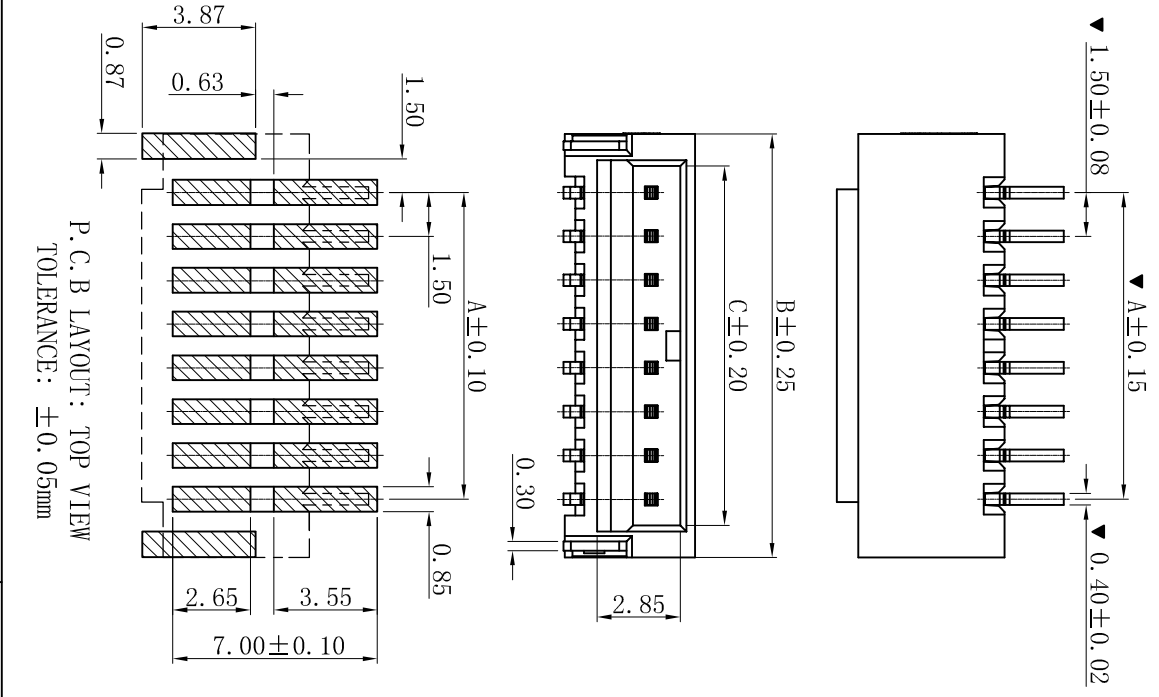


P. C. B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm

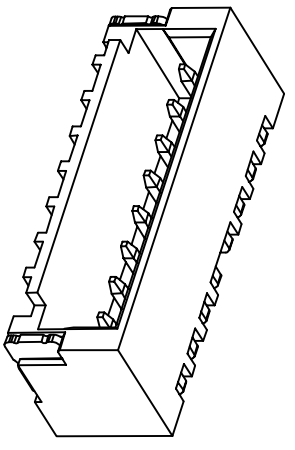

- SPECIFICATIONS**
- Voltage rating: 350V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -45° C~+105° C
  - Contact resistance: 20mΩ max

**■ WAFER**

- Part No. : W1502SR-NP-9T5W-A
- Poles : 02-15P
- Housing Material: PA9T UL94V-0
- Pin Material: Brass
- Contact Area Plating: Matte Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

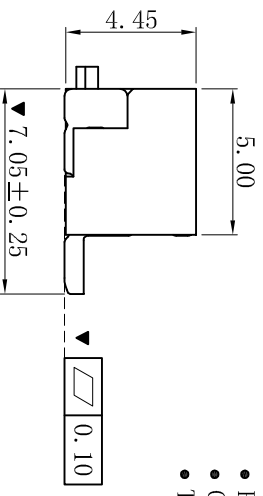

PART NO.	Dimensions (mm)		
	A	B	C
02	1.50	5.50	3.30
03	3.00	7.00	4.80
04	4.50	8.50	6.30
05	6.00	10.00	7.80
06	7.50	11.50	9.30
07	9.00	13.00	10.80
08	10.50	14.50	12.30
09	12.00	16.00	13.80
10	13.50	17.50	15.30
11	15.00	19.00	16.80
12	16.50	20.50	18.30
13	18.00	22.00	19.80
14	19.50	23.50	21.30
15	21.00	25.00	22.80

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-06-03

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

品名 (PART NAME): Molex 1.50mm SMT 卧式 Wafer Connector Series

料号 (PART NO): W1502SR-NP-9T5W-A

更新图面	2019-06-03	陈雄军	承认
修订版本	2015-11-04	陈雄军	
变更图规格式内容	2013-12-27	陈雄军	
新版本	2011-05-24	陈雄军	
说明	日期	承认	
DESCRIPTION	DATE	APPRO.	
版次			
REV.			

1 2 3 4 5 6 7 8 9 10