
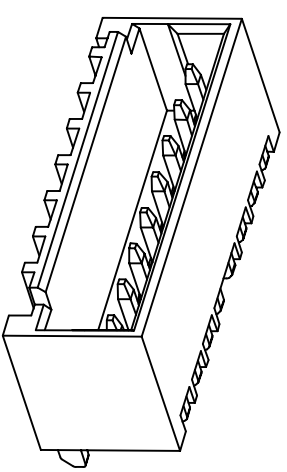
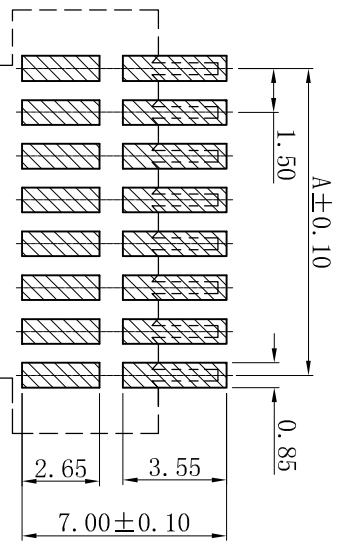
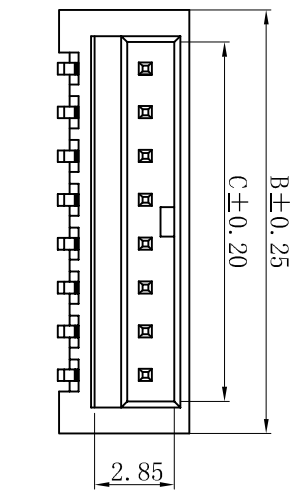


ROHS

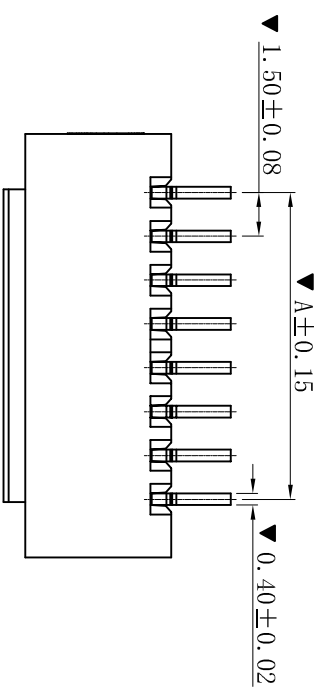

- SPECIFICATIONS
- Voltage rating: 350V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -45° C +105° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W1502SR-NP-LPSW-B
 - Poles : 02-15P
 - Housing Material : LCP UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Matte Tin-Plated
 - The Dimension Marked “▲” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	1.50	4.30	3.40
03	3.00	5.80	4.90
04	4.50	7.30	6.40
05	6.00	8.80	7.90
06	7.50	10.30	9.40
07	9.00	11.80	10.90
08	10.50	13.30	12.40
09	12.00	14.80	13.90
10	13.50	16.30	15.40
11	15.00	17.80	16.90
12	16.50	19.30	18.40
13	18.00	20.80	19.90
14	19.50	22.30	21.40
15	21.00	23.80	22.90

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.05 ANGLE: ±1°	
修订版本		2015-11-04	陈雄军	绘图/DR	陈雄军
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK	陈雄军
新版本		2011-05-24	陈雄军	批准/APPRO	胡进
说明		日期	承认	日期/DATE	2019-06-03
DESCRPTION		DATE	APPRO.		

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	W1502SR-NP-LPSW-B	状态码 C
单位 Unit MM	Molex 1.50mm SMT 卧式 Wafer Connector Series			
比例/Scale 1:1				
页码/SHEET 1/1				
版本/Rev D				