
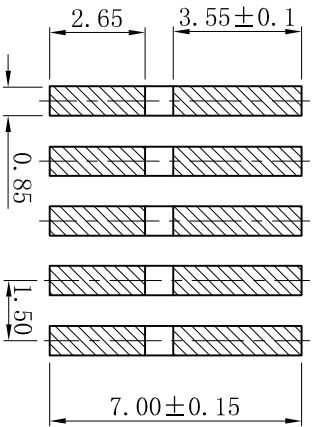
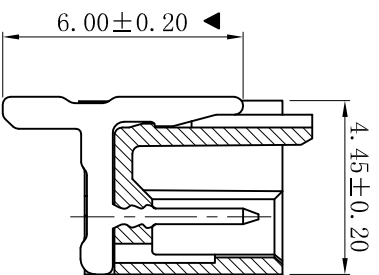
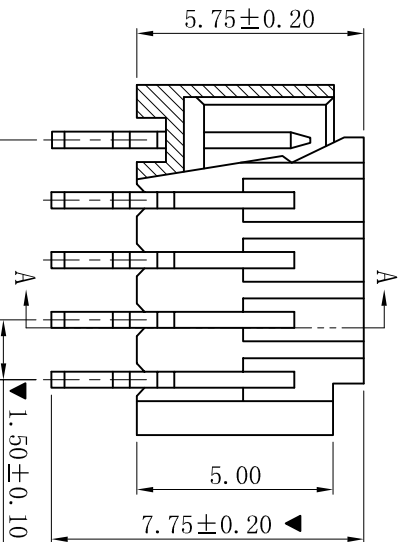


RoHS

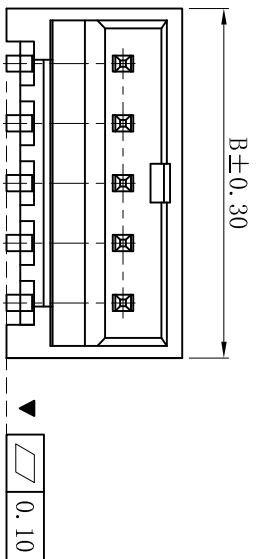

P.C.B LAYOUT
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 350V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W1502SR-NP
- Poles : 02-15P
- Housing Material: PA9T UL94V-0
- Pin Material: Phosphor Bronze
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	1.50	4.30
03	3.00	5.80
04	4.50	7.30
05	6.00	8.80
06	7.50	10.30
07	9.00	11.80
08	10.50	13.30
09	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

SECTION : A-A

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	修订版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	说明	日期	承认	说明
1	DESCRIPTION	DATE	APPRO.	REV.

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法	第一角	品名	Molex 1.50mm SMT 卧式 Wafer
单位	MM	(PART NAME)	Connector Series
比例/Scale	1:1	料号	W1502SR-NP
大小/Size	A4	(PART NO)	状态码
页码/SHEET	1/1		C
版本/Rev	D		

1 2 3 4 5 6 7 8 9 10