
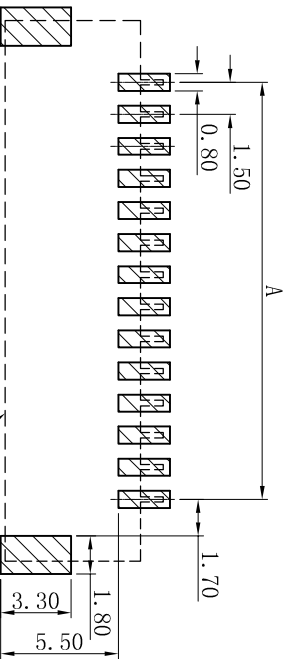
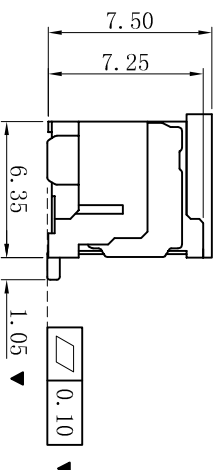
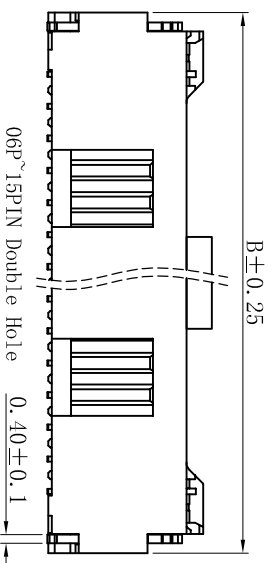
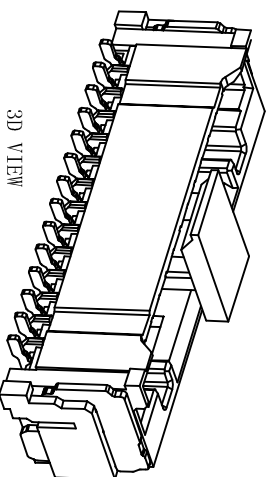


ROHS

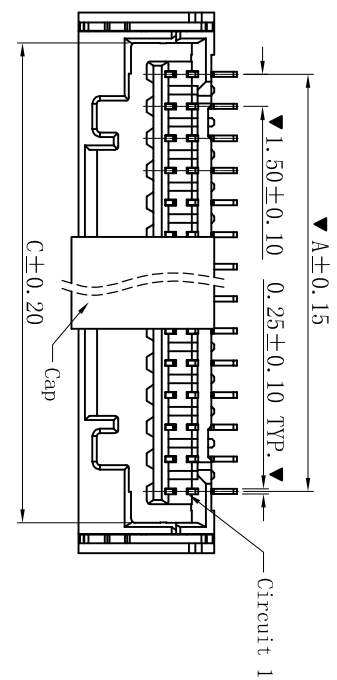

02P~05PIN Single Hole

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40°C~+105°C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W1502SV-NP-A
- Poles : 02-15P
- Housing Material : LCP UL94V-0, Natural Color
- Pin Material : Phosphor Bronze
- Solder Tabs Material : Brass, Matte Tin-Plated
- Contact Area Plating : Tin-plated
- The Dimension Marked "▲" Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	1.50	7.30	4.45
03	3.00	8.80	5.95
04	4.50	10.30	7.45
05	6.00	11.80	8.95
06	7.50	13.30	10.45
07	9.00	14.80	11.95
08	10.50	16.30	13.45
09	12.00	17.80	14.95
10	13.50	19.30	16.45
11	15.00	20.80	17.95
12	16.50	22.30	19.45
13	18.00	23.80	20.95
14	19.50	25.30	22.45
15	21.00	26.80	23.95

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors Co., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
ANGLE: ±1°	

Connectors

投影法
Projection



单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/Sheet
1/1

品名 (PART NAME)
Molex 1.50mm SMT 立式 Wafer Connector Series

料号 (PART NO)
W1502SV-NP-A

状态码
C

更新图面 更新版本	2019-06-03	PP, David	审核/CHECK	陈雄军
说明 DESCRIPTION	2019-01-17	PP, David	核准/APPRO	胡进
版次 REV.	1		日期 DATE	2019-06-03
	2		承认 APPRO.	

绘图/DR	PP, David
日期/DATE	2019-06-03

日期/DATE	2019-06-03
承认 APPRO.	

日期/DATE	2019-06-03
承认 APPRO.	

状态码
C