

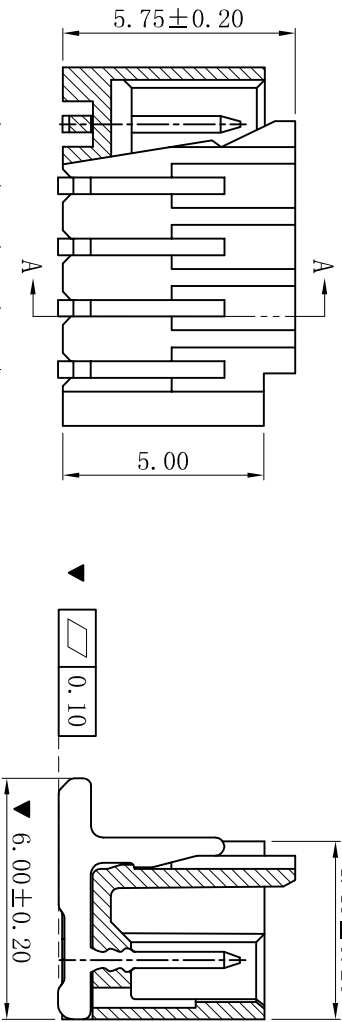



ROHS

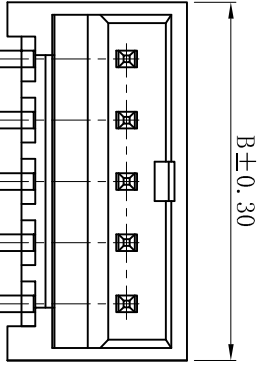

SECTION: A-A

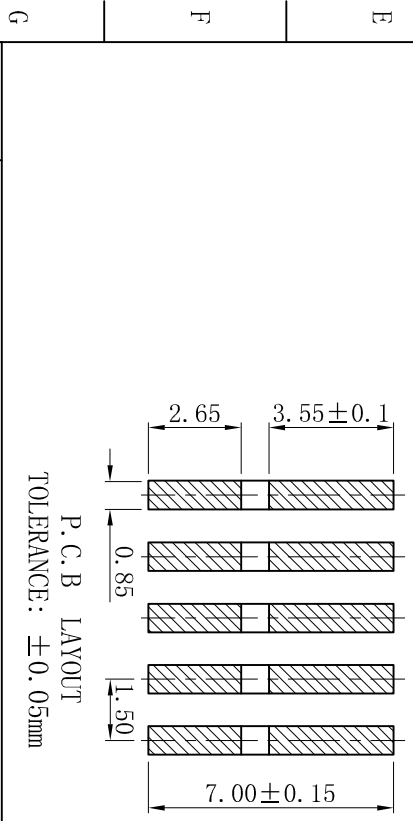

P.C.B LAYOUT
TOLERANCE: ± 0.05mm

- SPECIFICATIONS
- Voltage rating: 350V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W1502SV-NP
 - Poles : 02-15P
 - Housing Material: PA9T UL94V-0
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	1.50	4.30
03	3.00	5.80
04	4.50	7.30
05	6.00	8.80
06	7.50	10.30
07	9.00	11.80
08	10.50	13.30
09	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.05		投影法 Projection 单位 Unit MM		品名 (PART NAME) Molex 1.50mm SMT 立式 Wafer Connector Series	
修订版本		2015-11-04	陈雄军	ANGLE: ±1°		比例/Scale 1:1		料号 (PART NO) W1502SV-NP	
变更图宽格式内容		2013-12-27	陈雄军	绘图/DR		大小/Size A4		状态码 C	
新版本		2011-05-24	陈雄军	审核/CHECK		页码/Sheet 1/1			
说明 DESCRIPTION		日期 DATE	承认 APPRO.	批准/APPRO		版本/Rev D			
1		2	3	4		5		6	
7		8	9	10					

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd