




ROHS

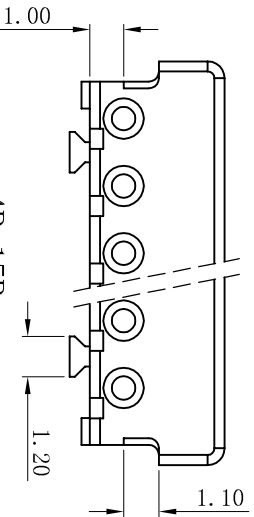


4P-15P










3P



2P



- SPECIFICATIONS
- Voltage rating: 125V AC, DC
  - Current rating: 2.5A, AC, DC
  - Withstanding Voltage: 800V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C +85° C
- HOUSING
- Part No. : F2009-NP-XX#
  - Poles : 02-15P
  - Housing Material: PA66 UL94V-0
  - Pin Material: Phosphor Bronze
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

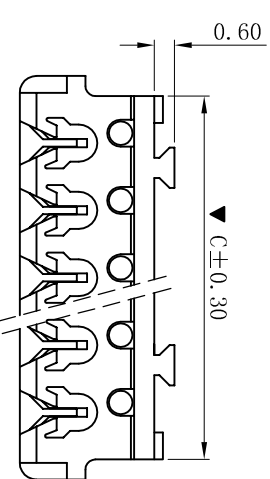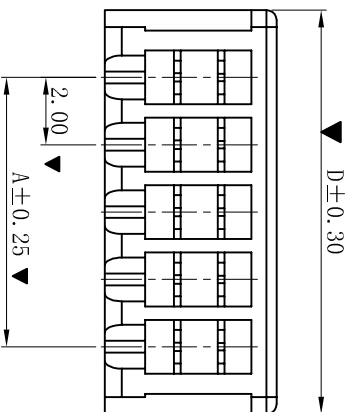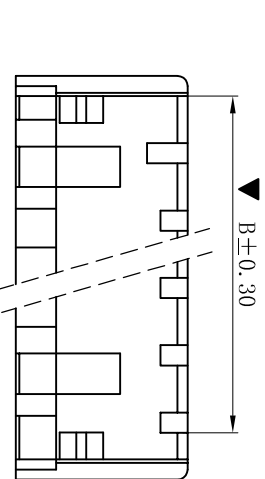

F2009-NP-26#	AWG#26, Insulation Diameter: 0.83mm-1.05mm
F2009-NP-28#	AWG#28, Insulation Diameter: 0.83mm-1.05mm
F2009-NP-24#	AWG#24, Insulation Diameter: 0.95mm-1.05mm

Poles	Dimensions (mm)			
	A	B	C	D
2	2.00	4.00	4.80	6.00
3	4.00	6.00	6.80	8.00
4	6.00	8.00	8.80	10.00
5	8.00	10.00	10.80	12.00
6	10.00	12.00	12.80	14.00
7	12.00	14.00	14.80	16.00
8	14.00	16.00	16.80	18.00
9	16.00	18.00	18.80	20.00
10	18.00	20.00	20.80	22.00
11	20.00	22.00	22.80	24.00
12	22.00	24.00	24.80	26.00
13	24.00	26.00	26.80	28.00
14	26.00	28.00	28.80	30.00
15	28.00	30.00	30.80	32.00

D	更新图面	2019-06-03	陈雄军	陈雄军	2019-06-03
C	修打版本	2015-11-04	陈雄军	陈雄军	2015-11-04
B	变更图宽格式内容	2013-12-27	陈雄军	陈雄军	2013-12-27
A	新版本	2011-05-24	陈雄军	陈雄军	2011-05-24
H	说明	日期	承认	承认	日期
1	版次	REV.	DESCRIPTION	DATE	APPRO.

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	D
品名 (PART NAME)	AMP 2.00mm 刺破式 Housing Connector Series
料号 (PART NO)	F2009-NP-XX#
状态码	C