







RoHS

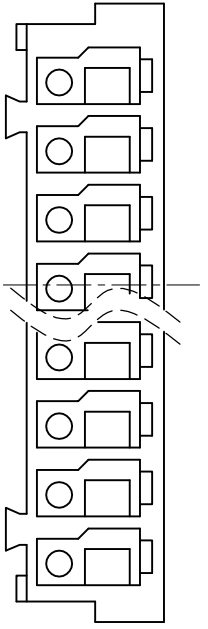

▼ B±0.30

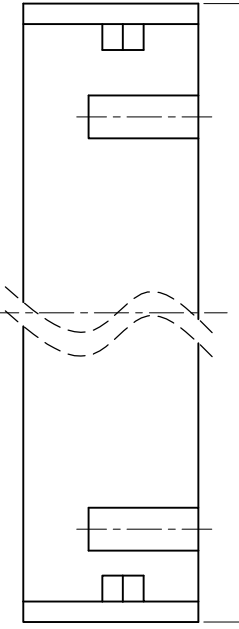

4.60

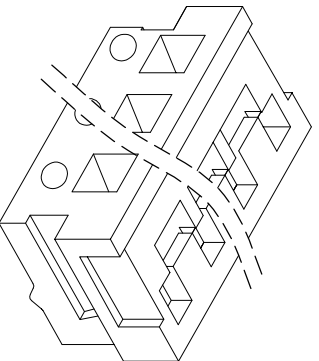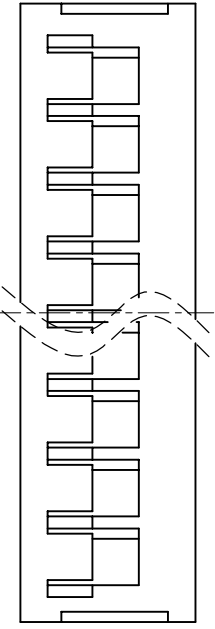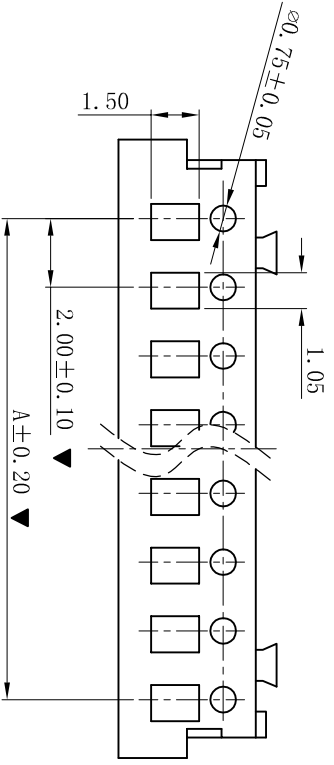

■ SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 2.5A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H2009-NP
- Poles : 02-15P
- Housing Material: PA66 UL94V-0
- The Dimension Marked "▼" Must Be Recorded

Poles	Dimensions (mm)	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connector's CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

投影法
Projection

单位 Unit
MM

比例/Scale
1:1

页码/SHEET
1/1

版本/Rev
D

品名
(PART NAME)

AMP 2.00mm Housing
Connector Series

料号
(PART NO)

H2009-NP

状态码
C

更新图面

2019-06-03

陈雄军

修订版本

2015-11-04

陈雄军

变更图宽格式内容

2013-12-27

陈雄军

新版本

2011-05-24

陈雄军

说明
DESCRIPTION

DATE:

承认
APPRO.

版次
REV.

1

2

3

4

5

6

7

8

9

10