



ROHS

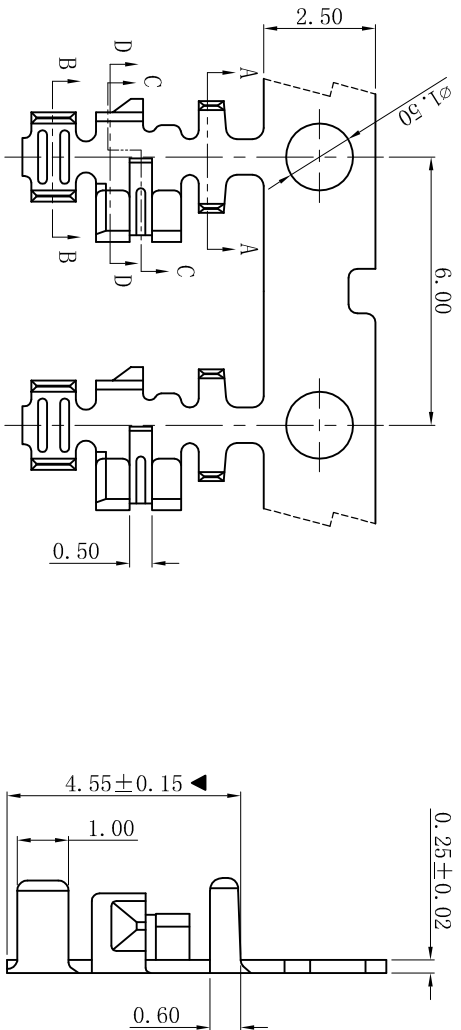


- SPECIFICATIONS
- Voltage rating: 125V AC, DC
 - Current rating: 2.5A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

■ TERMINAL


- Part No.: T2009PT
- Applicable wire: AWG#26-#28
- Material: Phosphor Bronze
- Finish: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded




SECTION: A-A



SECTION: B-B

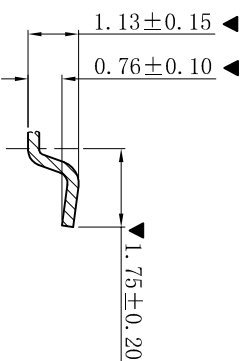

SECTION: C-C



SECTION: D-D

D	更新图面	2019-06-03	陈雄军	承认
C	修打版本	2015-11-04	陈雄军	
B	变更图宽格式内容	2013-12-27	陈雄军	
A	新版本	2011-05-24	陈雄军	
H	说明	日期	承认	
1	版次	REV.	DESCRIPTION	

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司		投影法	
Connectors		第一角	
Dongguan XiangYun Connectors CO., Ltd		MM	
品名	AMP 2.00mm Terminal	单位/Unit	MM
(PART NAME)	Connector Series	比例/Scale	1:1
料号	T2009PT	大小/Size	A4
(PART NO)		页码/Sheet	1/1
		版本/Rev	D
		状态码	C