





RoHS

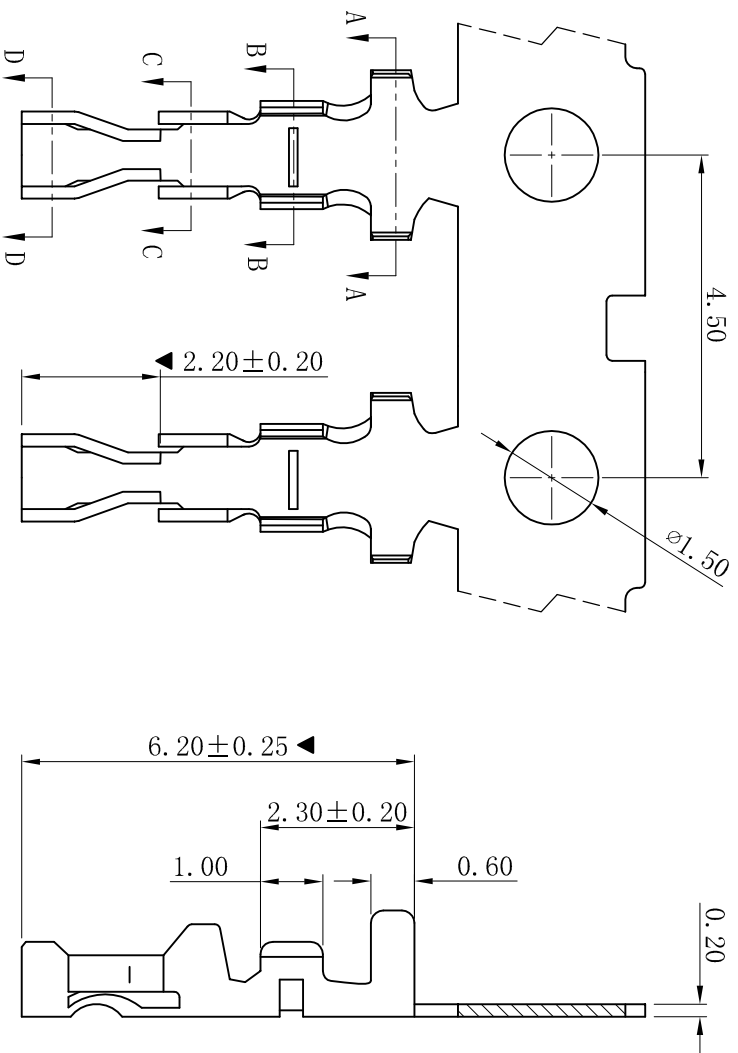


SECTION: A-A



SECTION: B-B



SECTION: C-C



SECTION: D-D

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- TERMINAL
- Part No. : T2010PG-T
 - Applicable wire: AWG#26-#30
 - Material: Phosphor Bronze
 - Finish: Gold-Flash or Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	修订版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
版次	说明	日期	承认	说明
REV.	DESCRIPTION	DATE	APPRO.	DESCRIPTION
1				
2				
3				
4				
5				

一般公差	0±0.30	绘图/DR	陈雄军
GENERAL TOLERANCE:	.00±0.25	审核/CHECK	陈雄军
	.000±0.10	批准/APPRO	胡进
	.05	日期/DATE	2019-06-03
	ANGLE: ±1°		

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法: 单位: MM
 比例/Scale: 1:1
 大小/Size: A4
 页码/Sheet: 1/1
 版本/Rev: D

品名: 杜邦 2.00mm Terminal Connector Series
 (PART NAME)

料号: T2010PG-T
 (PART NO)

状态码: C