





ROHS

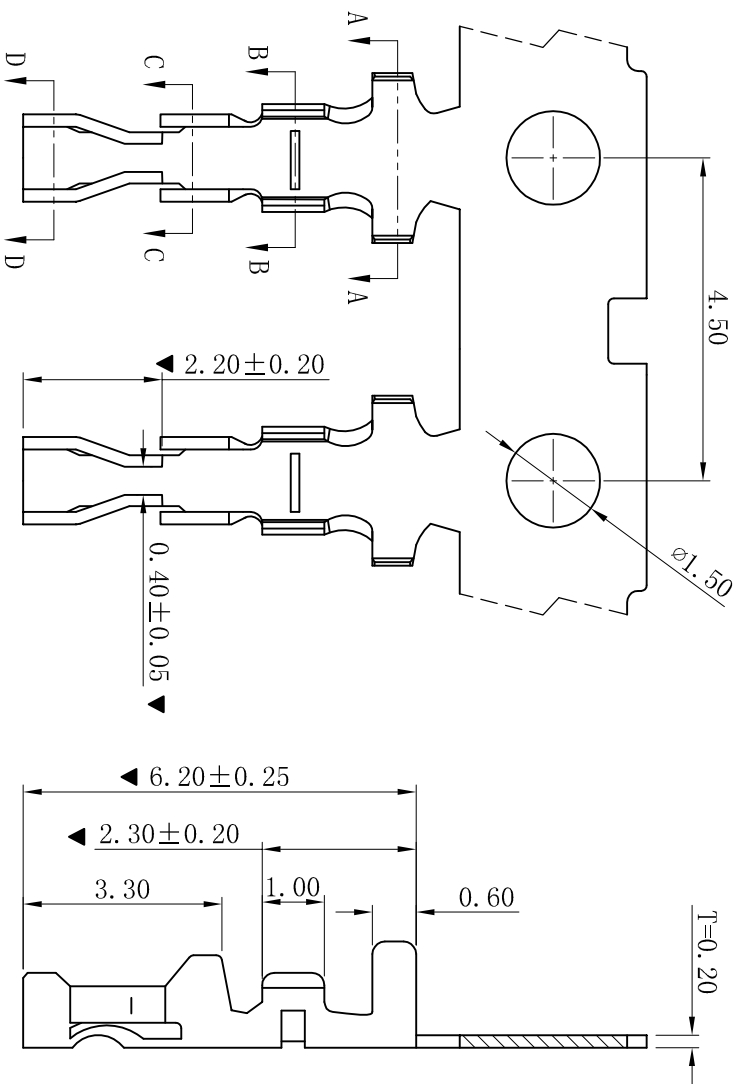


SECTION: A-A



SECTION: B-B

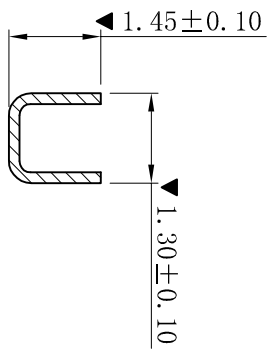

SECTION: C-C

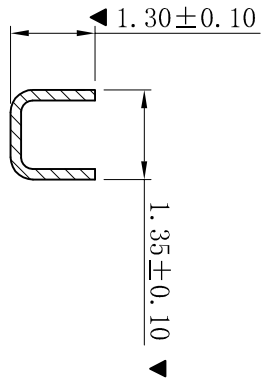

SECTION: D-D

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- TERMINAL
- Part No.: T2010PG
 - Applicable wire: AWG#26-#30
 - Material: Phosphor Bronze
 - Finish: Gold-flash or Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE: ±0.30 +0.25 -0.20 ±0.05 ±0.05 ±1°		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd		投影法 Projection 第一角 First Angle		品名 (PART NAME) 杜邦 2.00mm Terminal Connector Series		料号 (PART NO) T2010PG		状态码 C	
修打版本		2015-11-04		陈雄军		绘图/DR		陈雄军		MM							
变更图览格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		1:1							
新版本		2011-05-24		陈雄军		批准/APPRO		胡进		A4							
说明		日期		承认		日期/DATE		2019-06-03		页码/SHEET		1/1					
版次		REV.		1		1				D							