
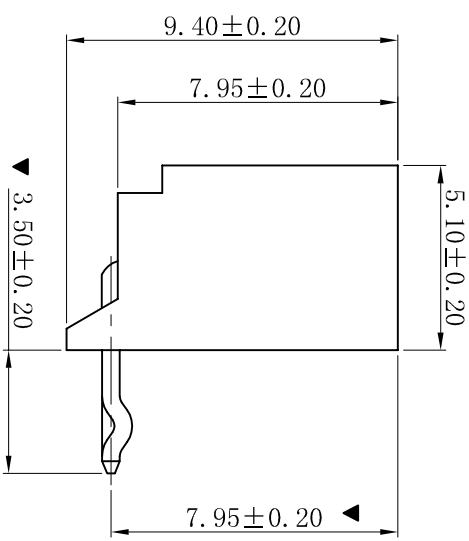
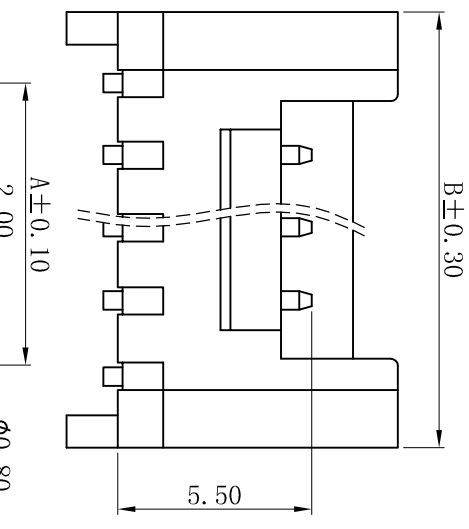


ROHS

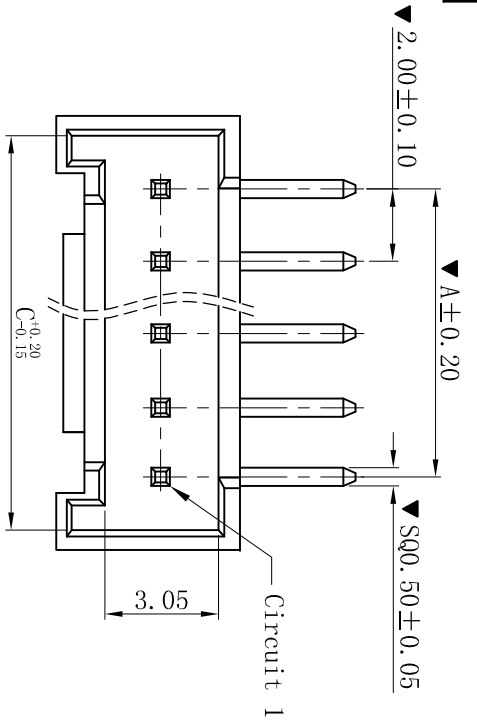

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2007R-NP-WL3.5
 - Poles : 02-16P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▲” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	2.00	6.00	4.70
03	4.00	8.00	6.70
04	6.00	10.00	8.70
05	8.00	12.00	10.70
06	10.00	14.00	12.70
07	12.00	16.00	14.70
08	14.00	18.00	16.70
09	16.00	20.00	18.70
10	18.00	22.00	20.70
11	20.00	24.00	22.70
12	22.00	26.00	24.70
13	24.00	28.00	26.70
14	26.00	30.00	28.70
15	28.00	32.00	30.70
16	30.00	34.00	32.70

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

更新图面	2019-06-03	PP, Duaw			
新版本	2018-08-31	PP, Duaw	承认	日期	说明
版次	REV.	DESCRIPTION	DATE	APPRO.	

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE: ±1°	
绘图/DR	PP, Duaw
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Projection
单位 Unit
MM
比例/Scale
1:1
大小/Size
A4
页码/SHEET
1/1
版本/Rev
B

品名
(PART NAME)
YH 2.00mm 90° Wafer
Connector Series

料号
(PART NO)
W2007R-NP-WL3.5

状态码
C