
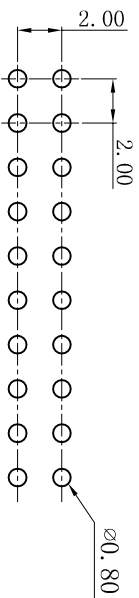
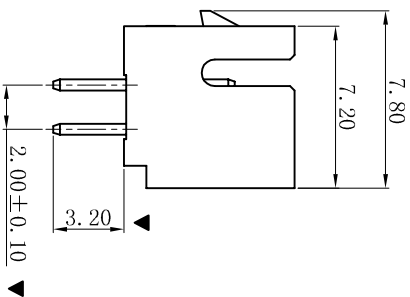
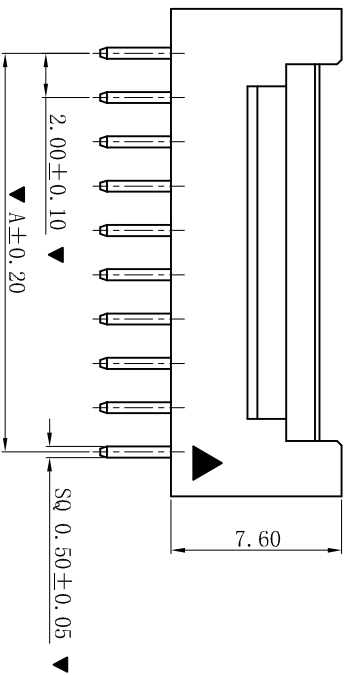
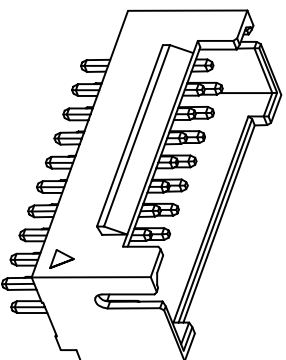


ROHS

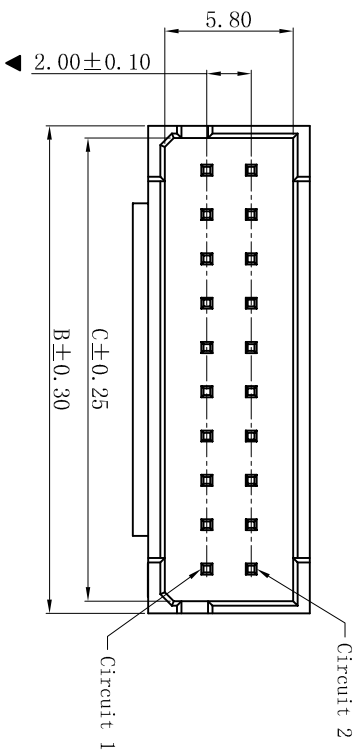

P.C.B LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2007V-2xNP
 - Poles : 04-40P & 60P
 - Housing Material: PA46 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
2x02	2.00	6.00	4.90
2x03	4.00	8.00	6.90
2x04	6.00	10.00	8.90
2x05	8.00	12.00	10.90
2x06	10.00	14.00	12.90
2x07	12.00	16.00	14.90
2x08	14.00	18.00	16.90
2x09	16.00	20.00	18.90
2x10	18.00	22.00	20.90
2x11	20.00	24.00	22.90
2x12	22.00	26.00	24.90
2x13	24.00	28.00	26.90
2x14	26.00	30.00	28.90
2x15	28.00	32.00	30.90
2x16	30.00	34.00	32.90
2x17	32.00	36.00	34.90
2x18	34.00	38.00	36.90
2x19	36.00	40.00	38.90
2x20	38.00	42.00	40.90
2x30	58.00	62.00	60.90

D	更新画面	2019-06-03	陈雄军	更新画面
C	修打版本	2015-11-04	陈雄军	修打版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	版次 RRV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
1	1	2	3	4

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.15
ANGLE:	±1°
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法: 单位: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: D

品名: PHB 2.00mm 180° Wafer
料号: W2007V-2xNP
连接器系列: Connector Series

状态码: C