
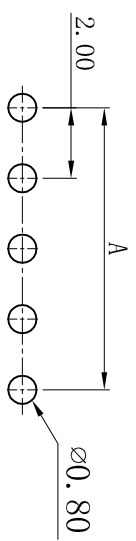
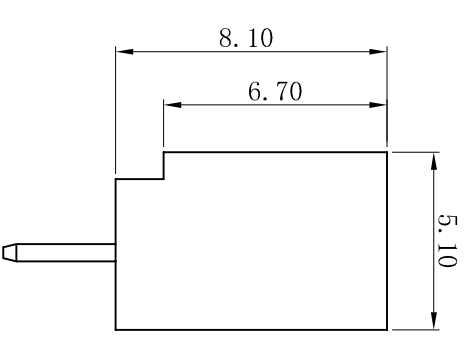
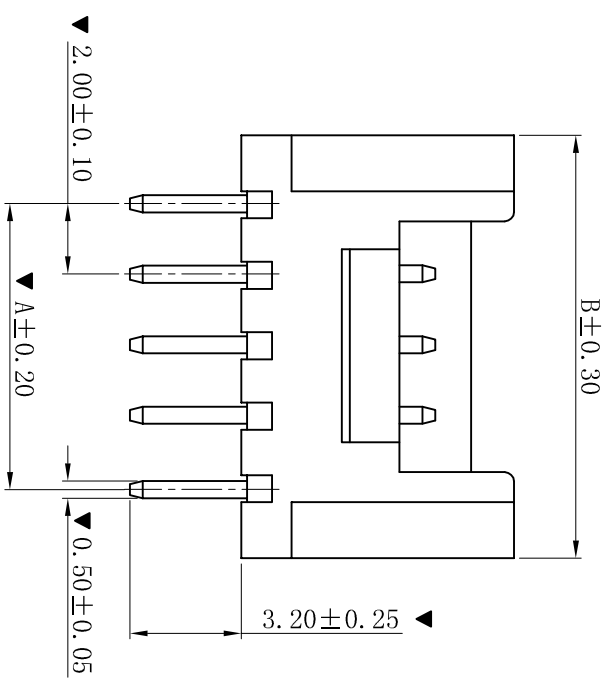



RoHS

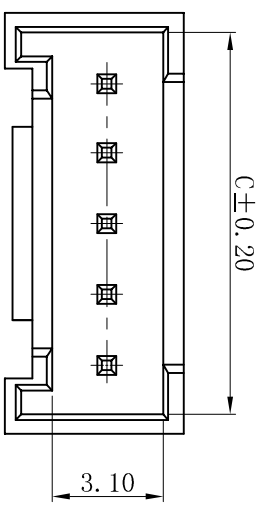

P.C.B LAYOUT

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C +85° C
  - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W2007V-NP
  - Poles : 02-16P
  - Housing Material: PA66 UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	2.00	6.00	4.70
03	4.00	8.00	6.70
04	6.00	10.00	8.70
05	8.00	12.00	10.70
06	10.00	14.00	12.70
07	12.00	16.00	14.70
08	14.00	18.00	16.70
09	16.00	20.00	18.70
10	18.00	22.00	20.70
11	20.00	24.00	22.70
12	22.00	26.00	24.70
13	24.00	28.00	26.70
14	26.00	30.00	28.70
15	28.00	32.00	30.70
16	30.00	34.00	32.70

D	更新图面	2019-06-03	P.C. Chen	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection 单位 Unit MM	品名 (PART NAME)	料号 (PART NO)	状态码
C	修订版本	2015-11-04	陈雄军	ANGLE: ±1°	比例/Scale 大小/Size 页码/SHEET 版本/Rev	YH 2.00mm 180° Wafer Connector Series	W2007V-NP	C
B	变更图宽格式内容	2013-12-27	陈雄军	绘图/DR	审核/CHECK			
A	新版本	2011-05-24	陈雄军	批准/APPRO	核进			
H	说明	日期	承认	日期/DATE	2019-06-03			
1	版次	REV.	说明	DESCRIPTION				

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd