
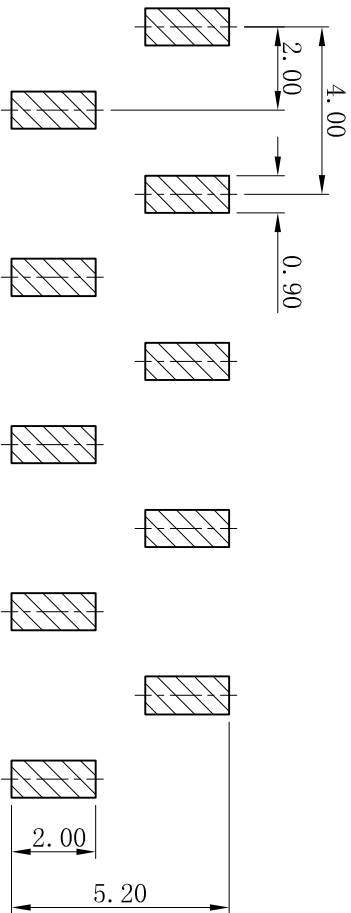
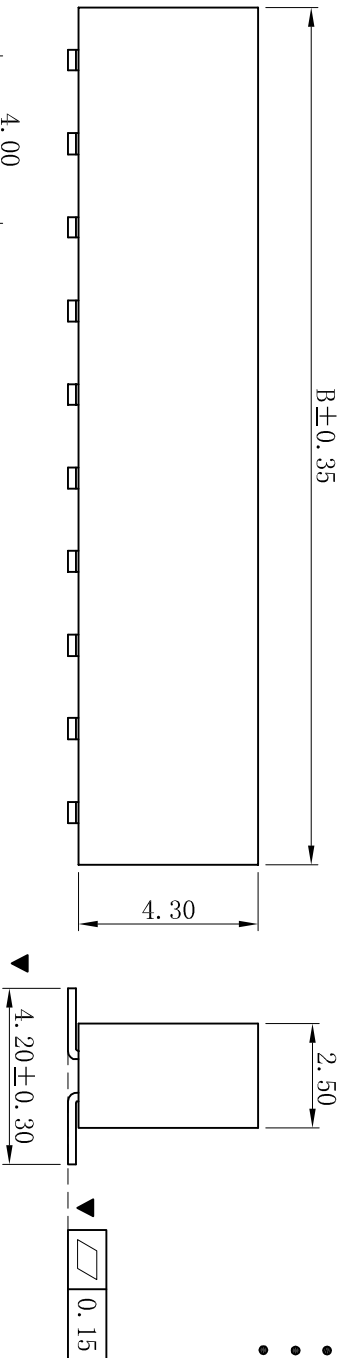
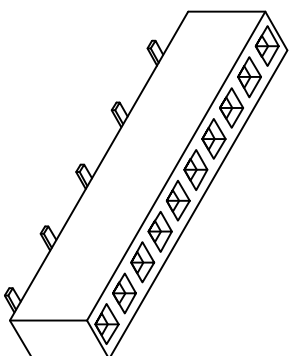


ROHS

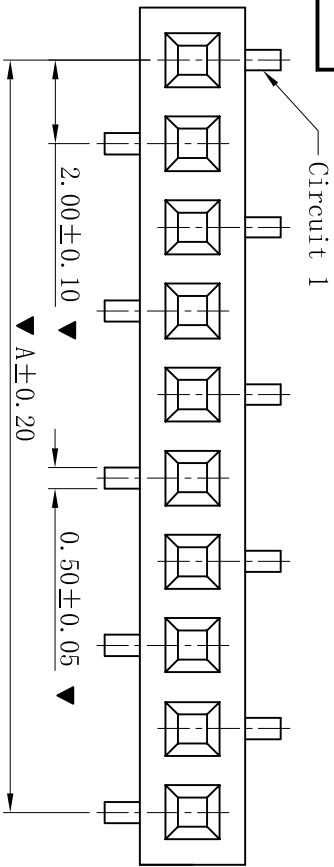

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2010MSV-1xNP
 - Poles : 02-40P
 - Housing Material : PA6T UL94V-0
 - Pin Material : Phosphor Bronze
 - Contact Area Plating: Gold-Flash
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		Poles	Dimension (mm)	
	A	B		A	B
02	2.00	4.60	22	42.00	44.60
03	4.00	6.60	23	44.00	46.60
04	6.00	8.60	24	46.00	48.60
05	8.00	10.60	25	48.00	50.60
06	10.00	12.60	26	50.00	52.60
07	12.00	14.60	27	52.00	54.60
08	14.00	16.60	28	54.00	56.60
09	16.00	18.60	29	56.00	58.60
10	18.00	20.60	30	58.00	60.60
11	20.00	22.60	31	60.00	62.60
12	22.00	24.60	32	62.00	64.60
13	24.00	26.60	33	64.00	66.60
14	26.00	28.60	34	66.00	68.60
15	28.00	30.60	35	68.00	70.60
16	30.00	32.60	36	70.00	72.60
17	32.00	34.60	37	72.00	74.60
18	34.00	36.60	38	74.00	76.60
19	36.00	38.60	39	76.00	78.60
20	38.00	40.60	40	78.00	80.60
21	40.00	42.60			

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	D
品名 (PART NAME)	2.00mm 180° 排母 SMT
料号 (PART NO)	W2010MSV-1xNP
状态码	C

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			