


RoHS

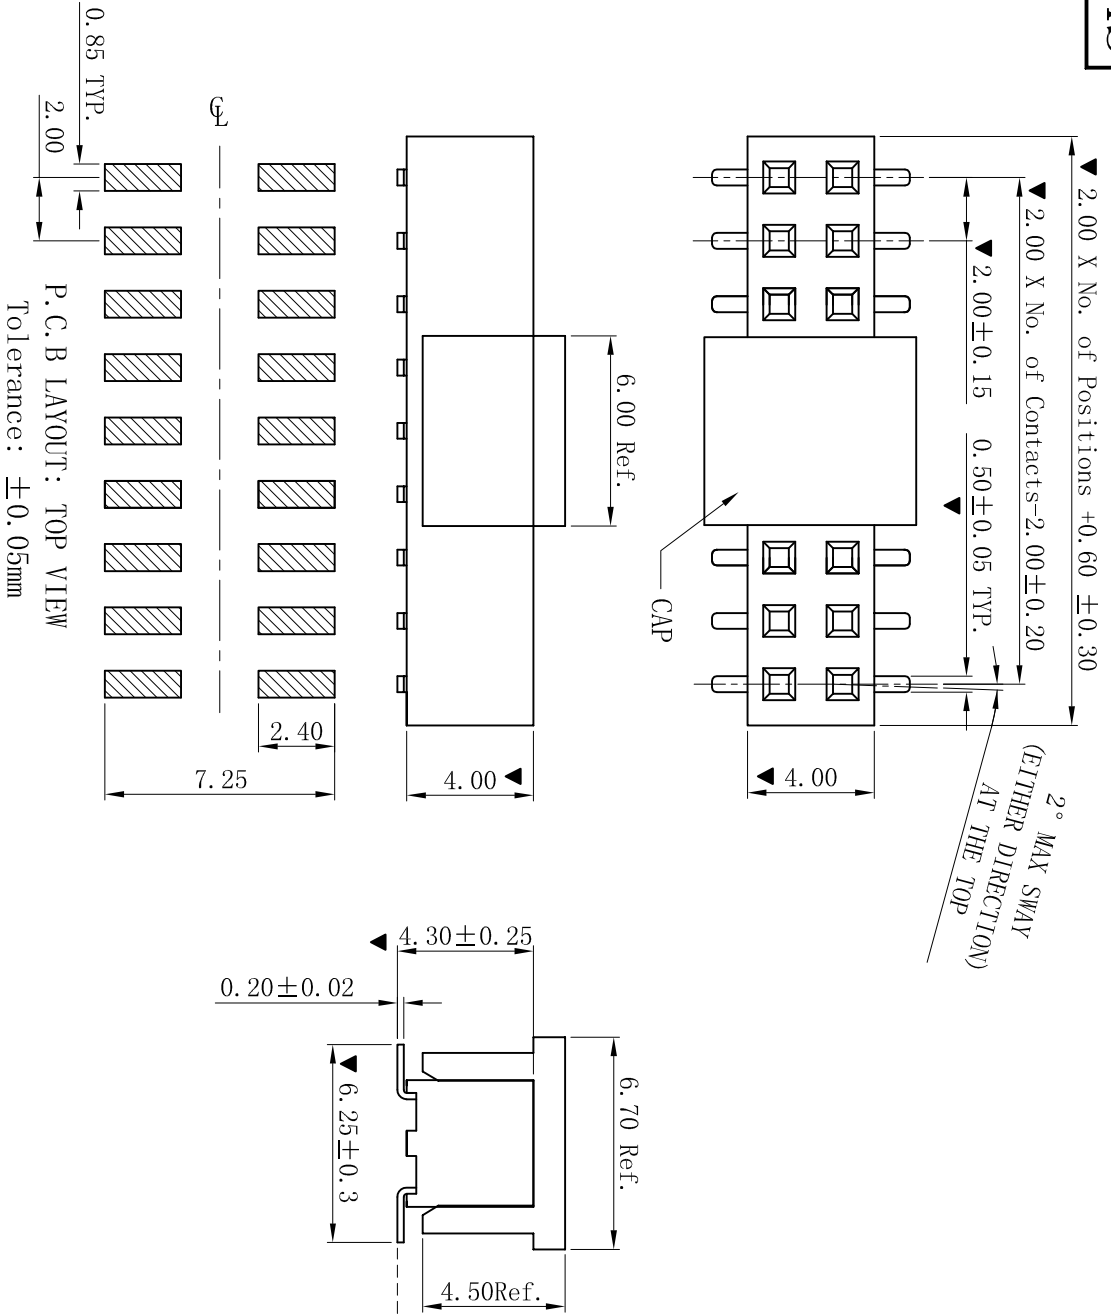

P.C.B LAYOUT: TOP VIEW  
Tolerance: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 2A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -40° C~+105° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No. : W2010MSV-2xNP-FC
  - Poles : 04-80P
  - Housing Material: PA6T UL94V-0
  - Pin Material: Phosphor Bronze
  - Contact Area Plating: Gold-flash
  - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	PP, Duuu	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05
新版本		2019-01-09	PP, Duuu	绘图/DR		0±0.30 ANGLE: ±1°
说明 DESCRIPTION		日期 DATE:	承认 APPRO.	审核/CHECK	陈雄军	0±0.30 ANGLE: ±1°
版次 REV.		1	1	核准/APPRO	胡进	0±0.30 ANGLE: ±1°

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法  
单位 Unit: MM  
比例/Scale: 1:1  
大小/Size: A4  
页码/Sheet: 1/1  
版本/Rev: B

品名 (PART NAME): 杜邦2.00mm 180° 排母  
H: 4.0 Connector Series

料号 (PART NO): W2010MSV-2xNP-FC

状态码: C