
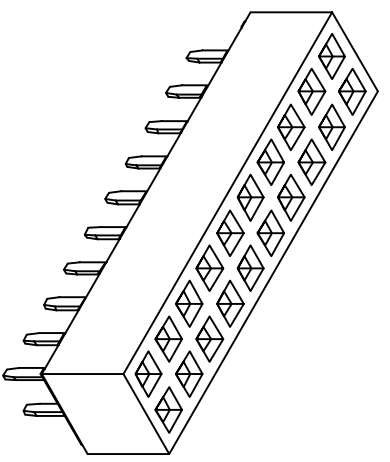
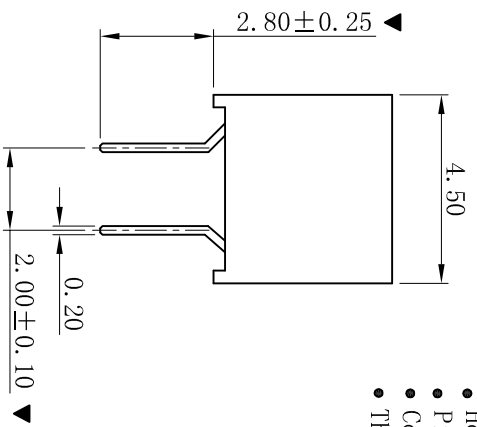
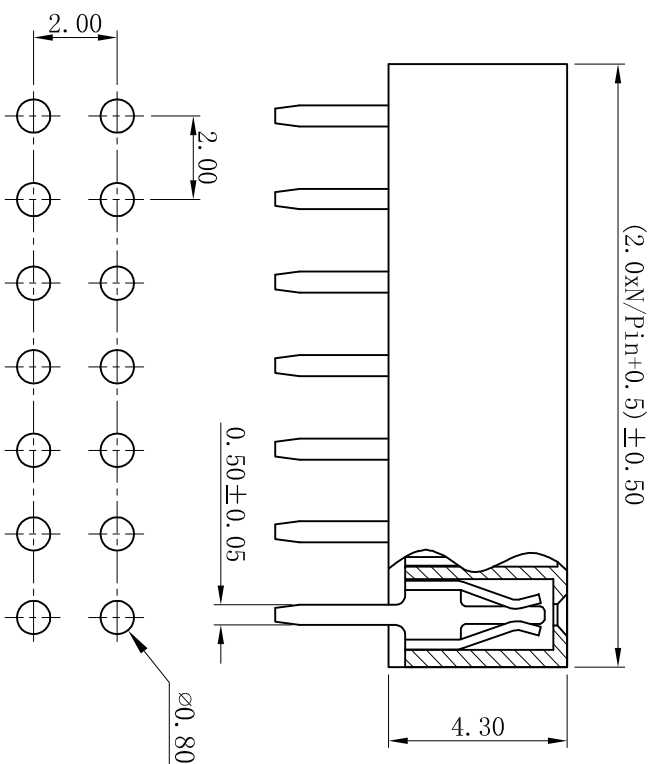


RoHS

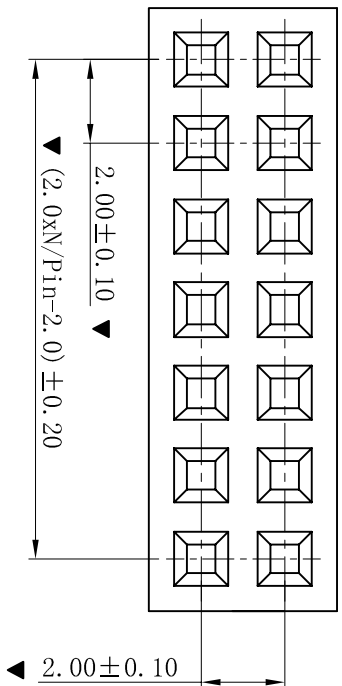

P.C.B LAYOUT

- SPECIFICATIONS
 - Voltage rating: 250V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40° C~+105° C
 - Contact resistance: 20mΩ max
- WAFER
 - Part No. : W2010MW-2xNP-PY
 - Poles : 04-80P
 - Housing Material: PA46 UL94V-0
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Gold-flash
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO., Ltd		品名 (PART NAME)		2.00mm 180° 排母 H:4.3 Connector Series		
修訂版本		2015-11-04	陈雄军	绘图/DR		▲	投影法 Projection		料号 (PART NO)		W2010MW-2xNP-PY		
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK		胡进	单位 Unit		状态码		C		
新版本		2011-05-24	陈雄军	批准/APPRO		胡进	比例/Scale		大小/SIZE		A4		
说明		2011-05-24	陈雄军	日期/DATE		2019-06-03	页码/SHEET		版本/Rev		D		
版次		APPRO.		日期/DATE		页码/SHEET		版本/Rev		D		D	
REV.		APPRO.		日期/DATE		页码/SHEET		版本/Rev		D		D	