


RoHS

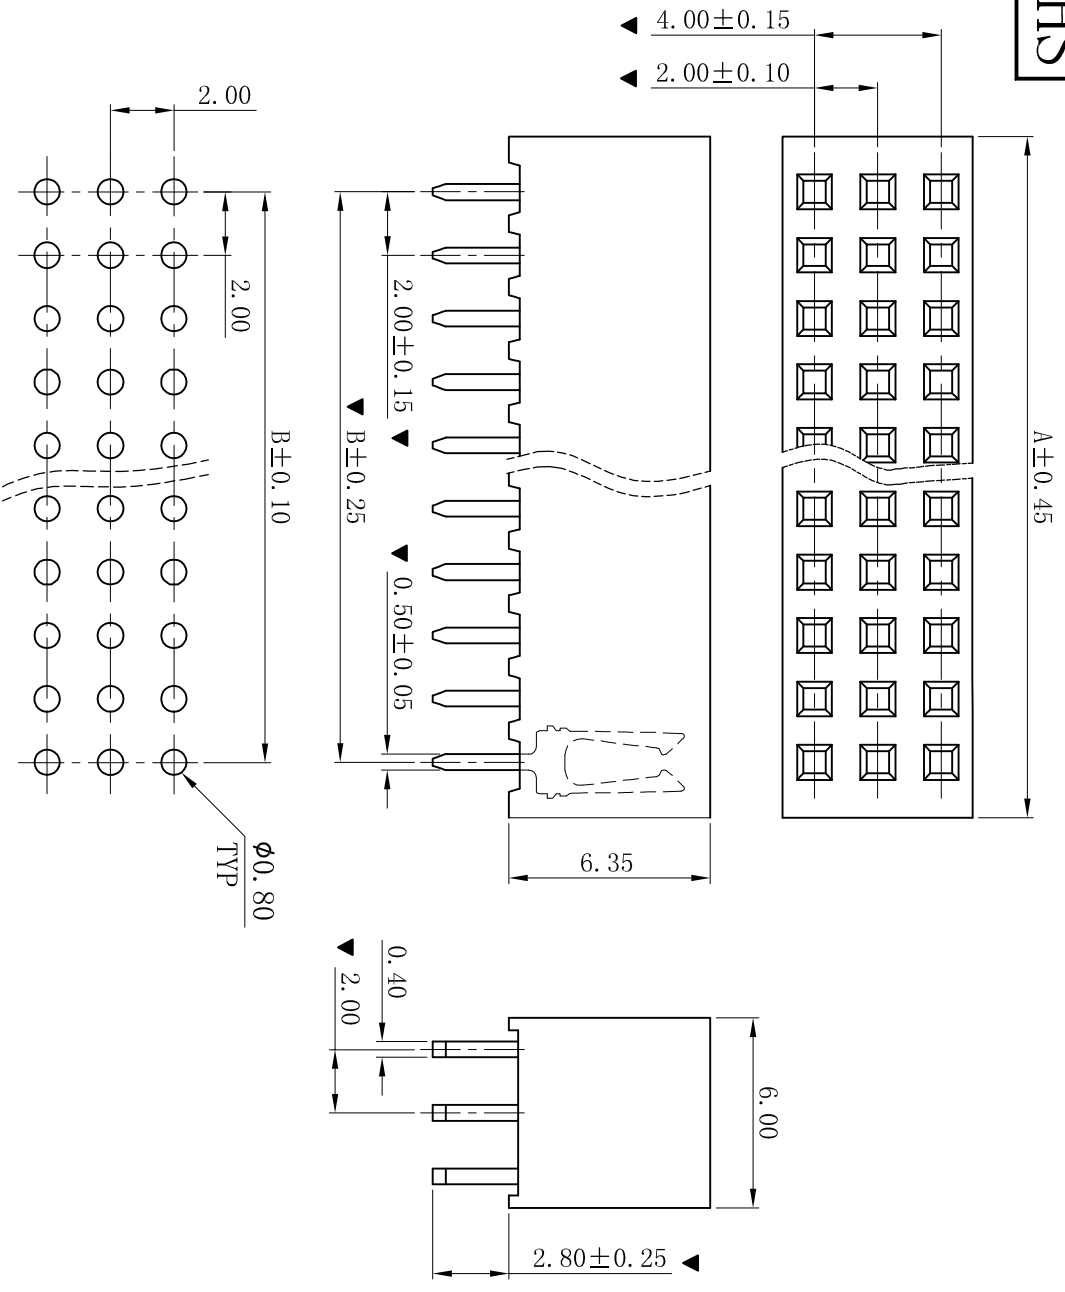

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2010MV-3xNP
- Poles : 03-120P
- Housing Material: PA6T UL94V-0
- Pin Material: Phosphor Bronze
- Contact Area Plating: Gold-flash
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		Poles	Dimension (mm)	
	A	B		A	B
3x01	2.00	0.00	3x21	42.00	40.00
3x02	4.00	2.00	3x22	44.00	42.00
3x03	6.00	4.00	3x23	46.00	44.00
3x04	8.00	6.00	3x24	48.00	46.00
3x05	10.00	8.00	3x25	50.00	48.00
3x06	12.00	10.00	3x26	52.00	50.00
3x07	14.00	12.00	3x27	54.00	52.00
3x08	16.00	14.00	3x28	56.00	54.00
3x09	18.00	16.00	3x29	58.00	56.00
3x10	20.00	18.00	3x30	60.00	58.00
3x11	22.00	20.00	3x31	62.00	60.00
3x12	24.00	22.00	3x32	64.00	62.00
3x13	26.00	24.00	3x33	66.00	64.00
3x14	28.00	26.00	3x34	68.00	66.00
3x15	30.00	28.00	3x35	70.00	68.00
3x16	32.00	30.00	3x36	72.00	70.00
3x17	34.00	32.00	3x37	74.00	72.00
3x18	36.00	34.00	3x38	76.00	74.00
3x19	38.00	36.00	3x39	78.00	76.00
3x20	40.00	38.00	3x40	80.00	78.00

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

绘图/DR	PPZ Duuu
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

更新图面	2019-06-04	PPZ Duuu
新版本	2017-09-11	Jeff

说明 DESCRIPTION	
版次 REV.	1

投影法  
Projection

单位 Unit: MM

比例/Scale: 1:1

大小/Size: A4

页码/Sheet: 1/1

版本/Rev: B

品名 (PART NAME)	2.00mm 3xNP 180° 排母
料号 (PART NO)	W2010MV-3xNP
状态码	C

更新图面	2019-06-04	PPZ Duuu
新版本	2017-09-11	Jeff
说明 DESCRIPTION		
版次 REV.	1	