RoHS

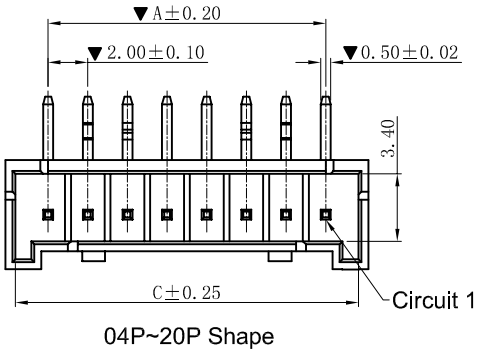

04P~20P Shape


02P~03P Shape

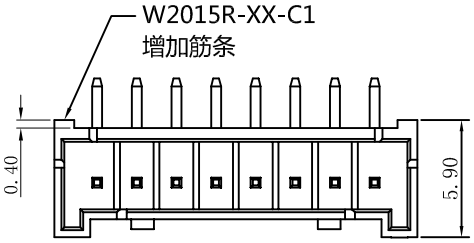

■ SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W2015R-NP
- Poles : 02-15P
- Housing Material:Nylon 66+15%GF UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

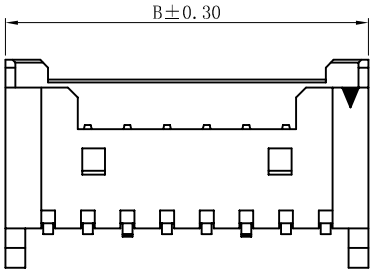

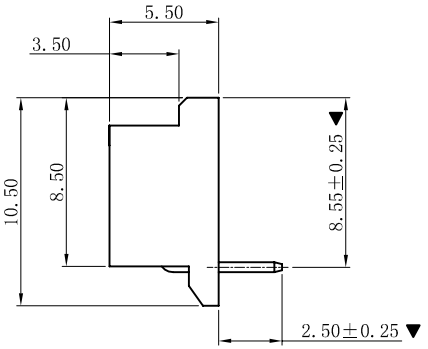

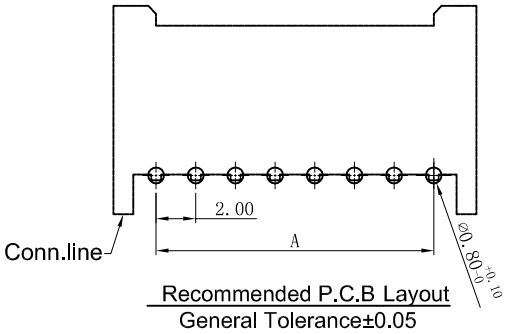

Recommended P.C.B Layout
General Tolerance±0.05



Poles	Dimensions (mm)		
	A	B	C
02	2.00	7.70	5.30
03	4.00	9.70	7.30
04	6.00	10.30	9.30
05	8.00	12.30	11.30
06	10.00	14.30	13.30
07	12.10	16.40	15.50
08	14.10	18.40	17.50
09	16.20	20.50	19.60
10	18.20	22.50	21.60
11	20.20	24.60	23.60
12	22.20	26.60	25.70
13	24.20	28.70	27.70
14	26.20	30.70	29.70
15	28.30	32.80	31.60

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	陈雄军
审核/CHECK	胡进
核准/APPRO	MR. feng
日期/DATE	2018-09-12

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection		品 名 (PART NEME)	Molex2.00mm 35363 90° Wafer Connector Series
单位 Unit	MM		
比例/Scale	1:1		
大小/SIZE	A4	料 号 (PART NO)	W2015R-NP
页码/SHEET	1/1		状态码 C
版本/Rev	C		