

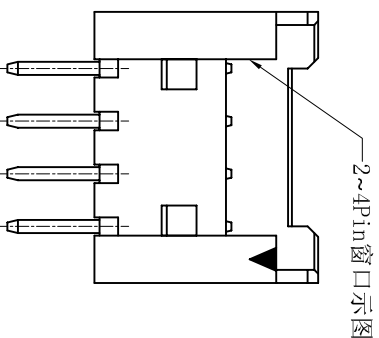

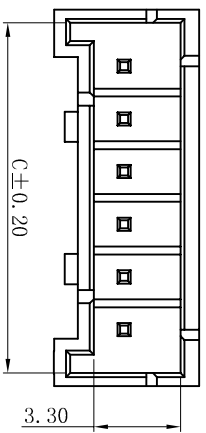
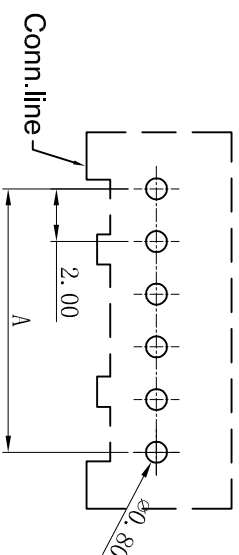


RoHS

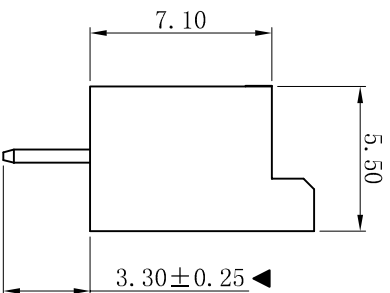

- SPECIFICATIONS**
- Voltage rating: 125V AC, DC
 - Current rating: 2A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W2015V-NP
 - Poles : 02~15P
 - Housing Material: Nylon 66+15%GF UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

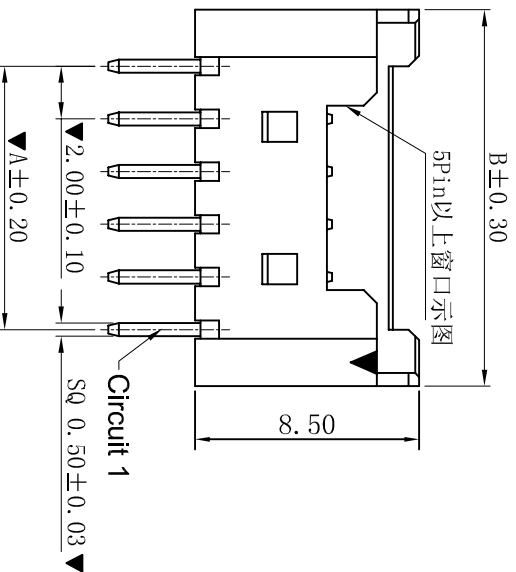

Poles	Dimensions (mm)		
	A	B	C
02	2.00	7.70	5.30
03	4.00	9.70	7.30
04	6.00	10.30	9.30
05	8.00	12.30	11.30
06	10.00	14.30	13.30
07	12.10	16.40	15.50
08	14.10	18.40	17.50
09	16.20	20.50	19.60
10	18.20	22.50	21.60
11	20.20	24.60	23.60
12	22.20	26.60	25.70
13	24.20	28.70	27.70
14	26.20	30.70	29.70
15	28.30	32.80	31.60

修改版本		2015-11-04	陈雄军
变更图宽格式内容		2013-12-27	陈雄军
新版本		2011-05-24	陈雄军
说明		日期	承认
DESCRIPTION		DATE:	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
	ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	MR. feng
日期/DATE	2018-09-12

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

Connectors

投影法	第一角	品名	Molex2.00mm 35362 180°
单位 Unit	MM	(PART NAME)	Wafer Connector Series
比例/Scale	1:1	料号	W2015V-NP
大小/Size	A4	(PART NO)	
页码/SHEET	1/1	状态码	C
版本/Rev	C		