


ROHS

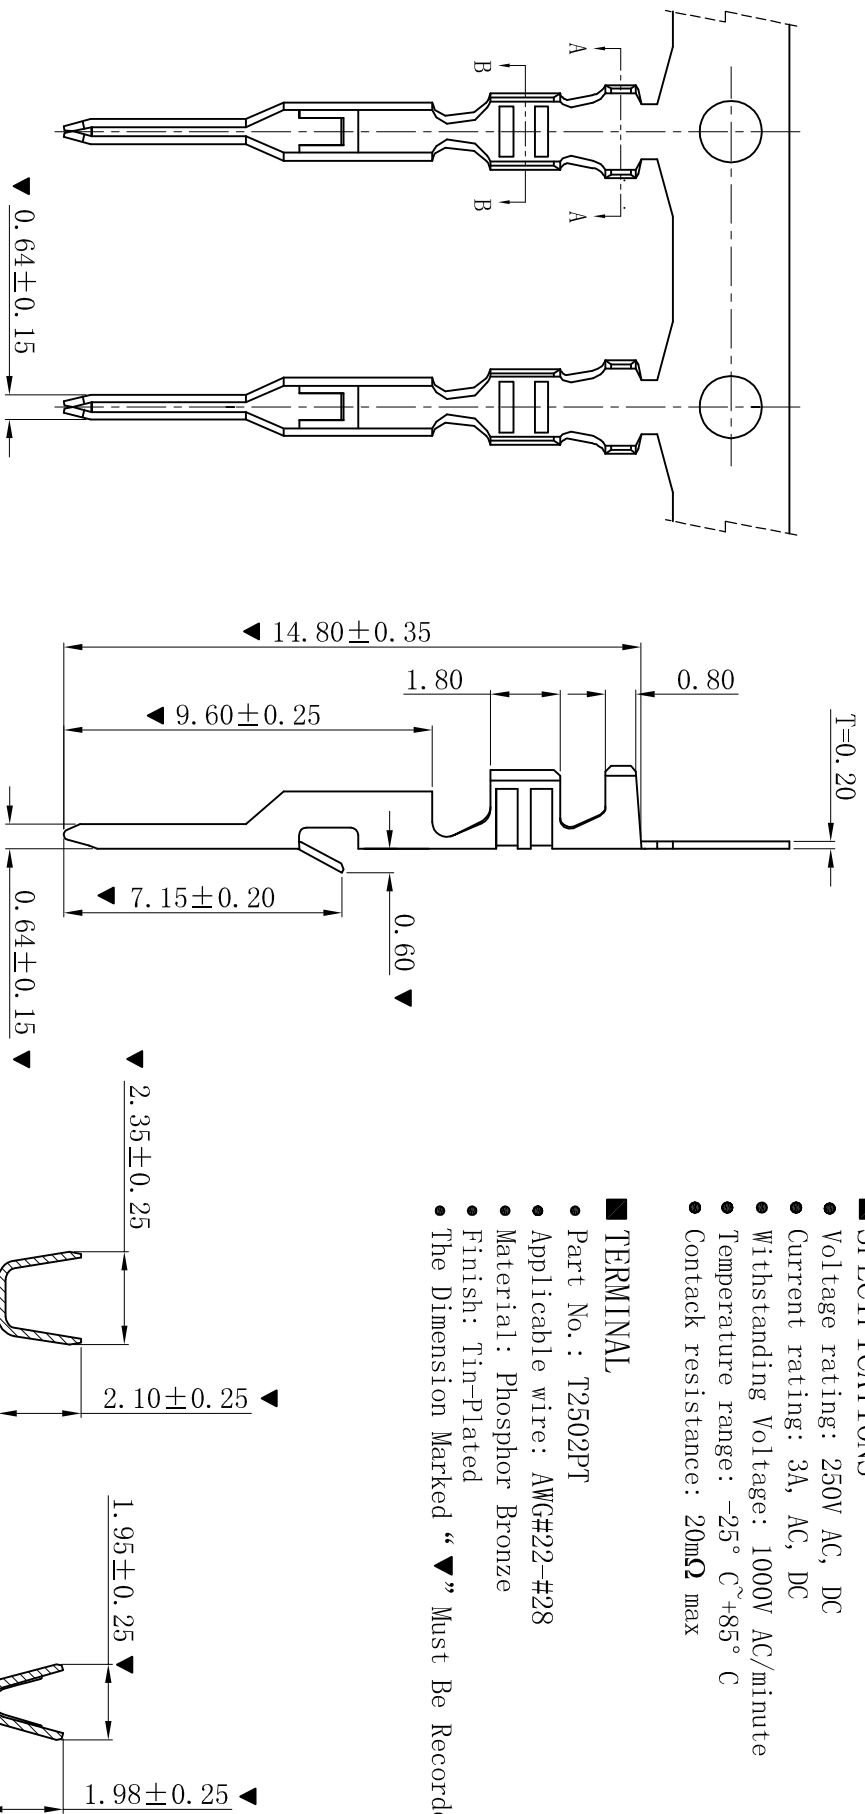

SECTION: A-A

SECTION: B-B

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Contact resistance: $20\text{m}\Omega$ max



■ TERMINAL

- Part No.: T2502PT
- Applicable wire: AWG#22-#28
- Material: Phosphor Bronze
- Finish: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°		投影法 Projection		品名 (PART NAME)		XH 2.50mm Male Terminal	
修打版本		2015-11-04		陈雄军		绘图/DR		陈雄军		单位 Unit		(PART NAME)		Connector Series	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		比例/Scale		料号 (PART NO)		T2502PT	
新版本		2011-05-24		陈雄军		批准/APPRO		胡进		大小/Size		A4			
说明		日期		承认		日期/DATE		2019-06-03		页码/SHEET		1/1			
版次		DESCRPTION		APPRO.						版本/Rev		D			
1		2		3		4		5		6		7		8	
1		2		3		4		5		6		7		8	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

Connectors



MM

1:1

A4

1/1

D

T2502PT

C