

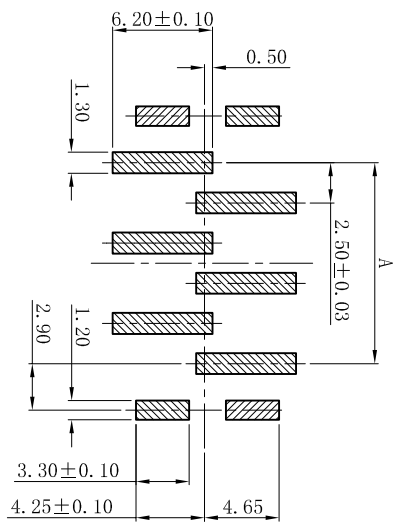
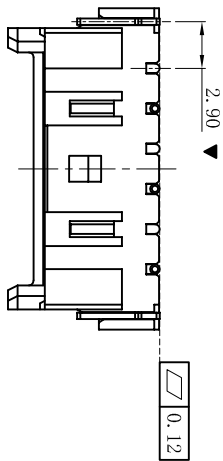

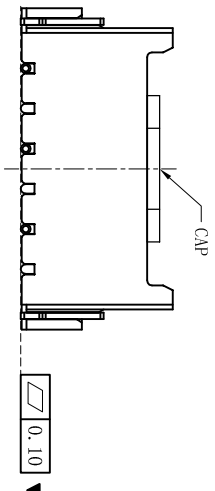


ROHS



P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

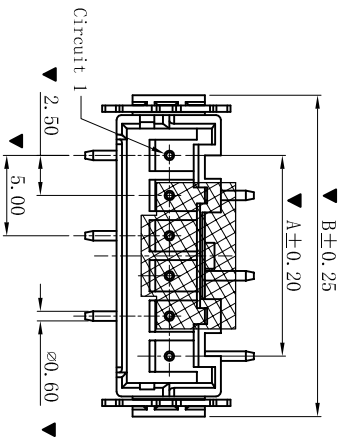

Poles	Dimensions (mm)	
	A	B
02	2.50	10.00
03	5.00	12.50
04	7.50	15.00
05	10.00	17.50
06	12.50	20.00
07	15.00	22.50
08	17.50	25.00
09	20.00	27.50
10	22.50	30.00
11	25.00	32.50
12	27.50	35.00
13	30.00	37.50
14	32.50	40.00
15	35.00	42.50

更新图面	
新版本	
说明	说明
版次	版次
REV.	REV.
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
	ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

品名 (PART NAME): XA 2.50mm 180° SMT Wafer
Connector Series

料号 (PART NO): W2509SV-NP

投影法: 第一角投影
单位: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/2
版本/Rev: B

状态码: C

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000 AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40° C~+105° C
 - Contact resistance: 10mΩ max
 - After environmental testing: 20mΩ max
- WAFER
- Part No.: W2509SV-NP
 - Poles: 02-15P
 - Housing Material: PA9T UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked "▼" Must Be Recorded

