


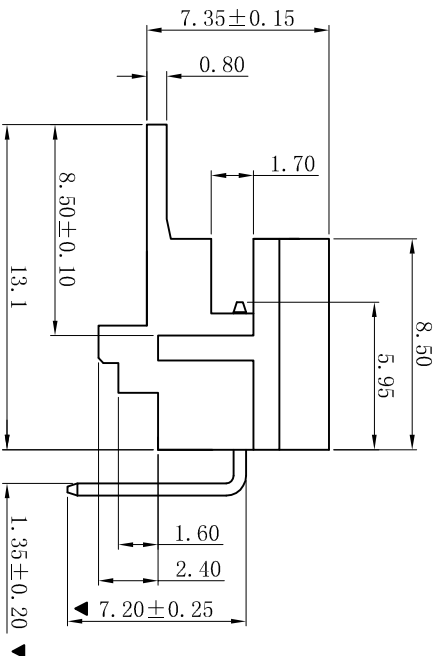



ROHS

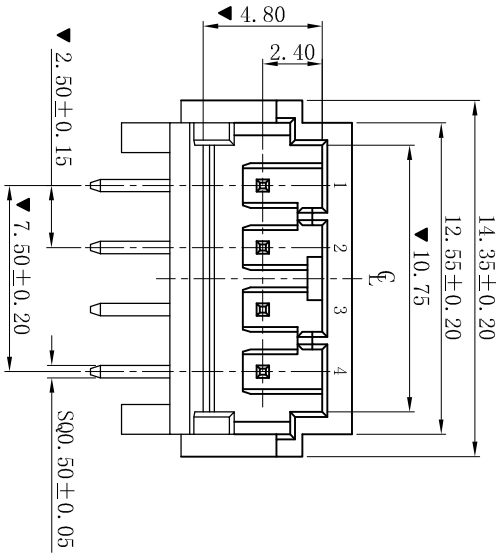

P.C.B. LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

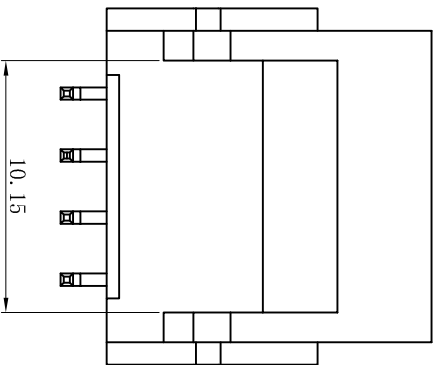

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No.: W2519R-04P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

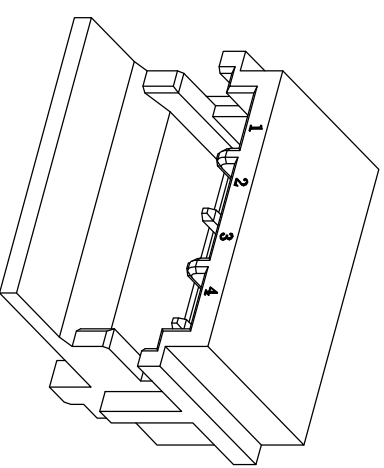

3D VIEW

更新图面		更新图面	2019-06-03	PP, Duaw	PP, Duaw
新版本		新版本	2018-10-26	PP, Duaw	PP, Duaw
说明		说明	日期	承认	承认
版次		版次	日期	承认	承认
REV.		REV.	DATE.	APPRO.	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE: ±1 $^{\circ}$	

XYDZ [®] 东莞市祥运连接器有限公司		DongGuan XiangYun Connectors CO., Ltd	
Connectors		Connectors	
投影法	第一角	单位	MM
比例/Scale	1:1	大小/Size	A4
页码/Sheet	1/1	版本/Rev	B
品名	(PART NAME)	料号	(PART NO)
2.50mm 90 $^{\circ}$ Wafer Connector Series		W2519R-04P	
状态码		C	