
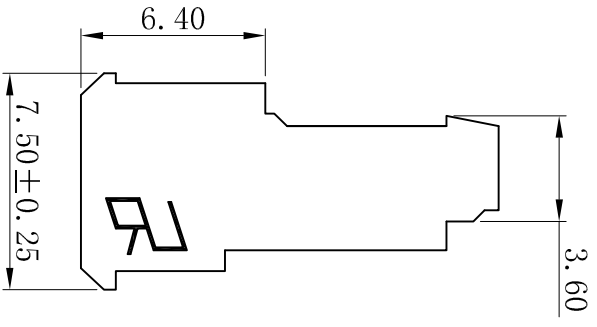
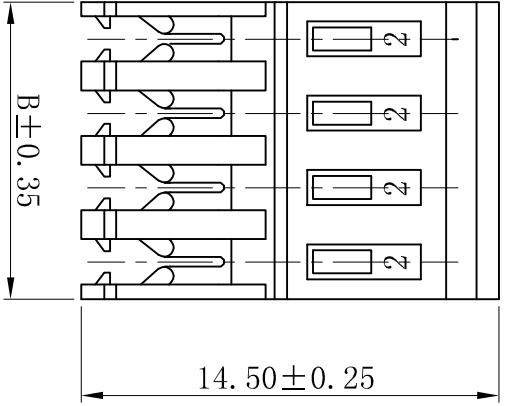


RoHS

Serial number	Wire size
2	22# AWG
4	24# AWG
6	26# AWG

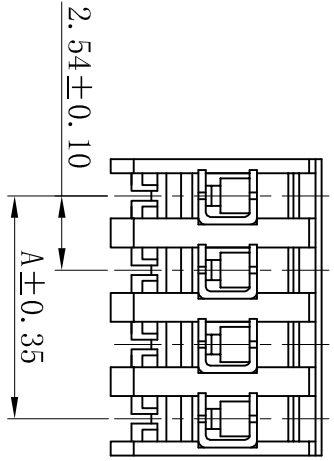

- SPECIFICATIONS
 - Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 700V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- HOUSING
 - Part No.: F2548A-NP
 - Poles : 02-16P
 - Housing Material : PA66 UL94V-2
 - Terminal Material : Brass, Tin-Plated

Poles	Dimensions (mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.06
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) IDC 2.54mm 刺破式 斜角 Connector Series	
修订版本		2015-11-04	陈雄军	绘图/DR 陈雄军		大小/Scale 1:1		料号 (PART NO) F2548A-NP	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK 陈雄军		页码/SHEET 1/1		状态码 C	
新版本		2011-05-24	陈雄军	批准/APPRO 胡进		版本/Rev D			
说明 DESCRIPTION		日期 DATE	承认 APPRO.	日期/DATE		版本/Rev			

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd