

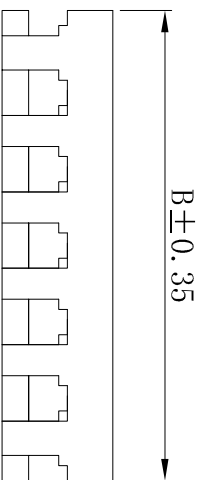



RoHS

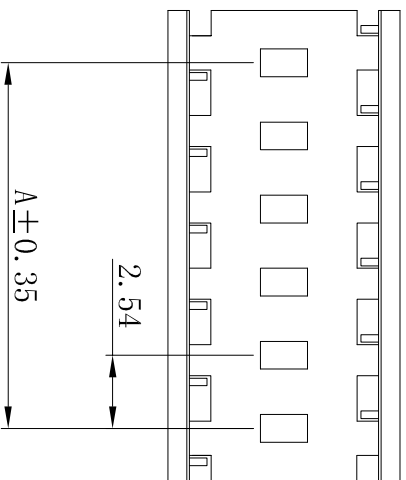

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 700V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : F2548G1-NP
- Poles : 02-16P
- Housing Material: PA66 UL94V-2

Poles	Dimensions (mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.06
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°	绘图/DR 审核/CHECK 批准/APPRO	陈雄军 陈雄军 胡进	日期/DATE 2019-06-03
C	修打版本	2015-11-04	陈雄军				
B	变更图宽格式内容	2013-12-27	陈雄军				
A	新版本	2011-05-24	陈雄军				
H	说明	日期	承认				
1	DESCRPTION	DATE	APPRO.				

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	品名 (PART NAME)	IDC 2.54mm CAP
单位 Unit	料号 (PART NO)	F2548G1-NP
比例/Scale		
大小/Size		
页码/SHEET		
版本/Rev		