


RoHS



C	Color	Wire size
R	Red	22# AWG
W	White	24# AWG
N	Natural	24# AWG
B	Black	24# AWG
b	Blue	26# AWG
G	Green	26# AWG

F2548T-NP-C

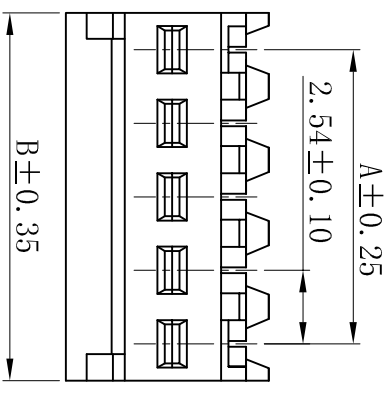

Pin number
Color/Wire size

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- HOUSING
- Part No. : F2548T-NP-C
 - Poles : 02-16P
 - Housing Material : PA66 UL94V-2
 - Terminal Material : Brass, Tin-Plated

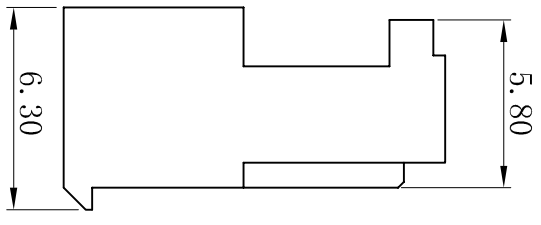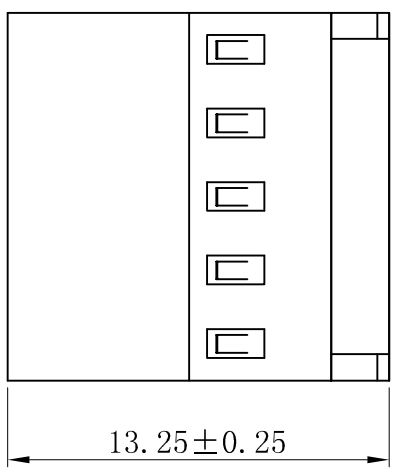

Poles	Dimensions (mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.06
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

D	更新图面	2019-06-03	陈雄军
C	修打版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	DESCRIPTION	DATE	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE:	±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Projection
单位 Unit
MM
比例/Scale
1:1
大小/Size
A4
页码/SHEET
1/1
版本/Rev
D

品名 (PART NAME)
IDC 2.54mm 刺破式 凸台 Connector Series

料号 (PART NO)
F2548T-NP-C

状态码
C