


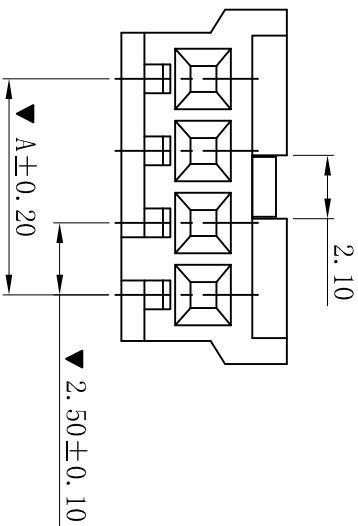


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25 $^{\circ}$ C~85 $^{\circ}$ C

■ HOUSING

- Part No.: H2540-NP-D
- Poles : 02-12P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

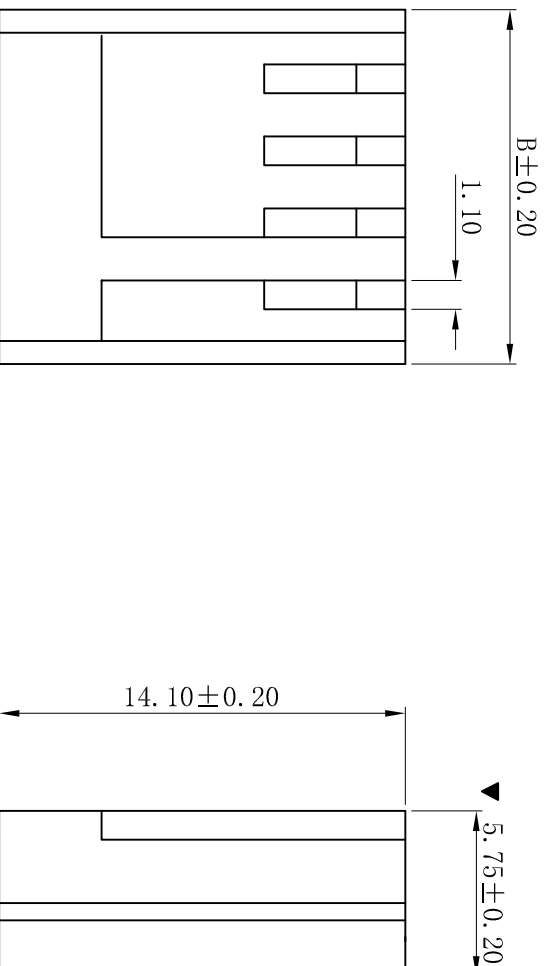

Poles	Dimensions(mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50

										XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors Co.,Ltd																			
						一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .00±0.05				投影法 		品名 (PART NAME)		AMP 2.50mm Male Housing Connector Series		料号 (PART NO)		H2540-NP-D		状态码 C							
D		更新图面		2019-06-03		陈雄军				绘图/DR		Pro View		单位 Unit		MM		比例/Scale		1:1		页码/SHEET		1/1		版本/Rev		D	
C		修订版本		2015-11-04		陈雄军				审核/CHECK		陈雄军		核准/APPRO		胡进													
B		变更图宽格式内容		2013-12-27		陈雄军																							
A		新版本		2011-05-24		陈雄军																							
版次 REV.		说明 DESCRIPTION		日期 DATE.		承认 APPRO.				日期/DATE		2019-06-03																	