
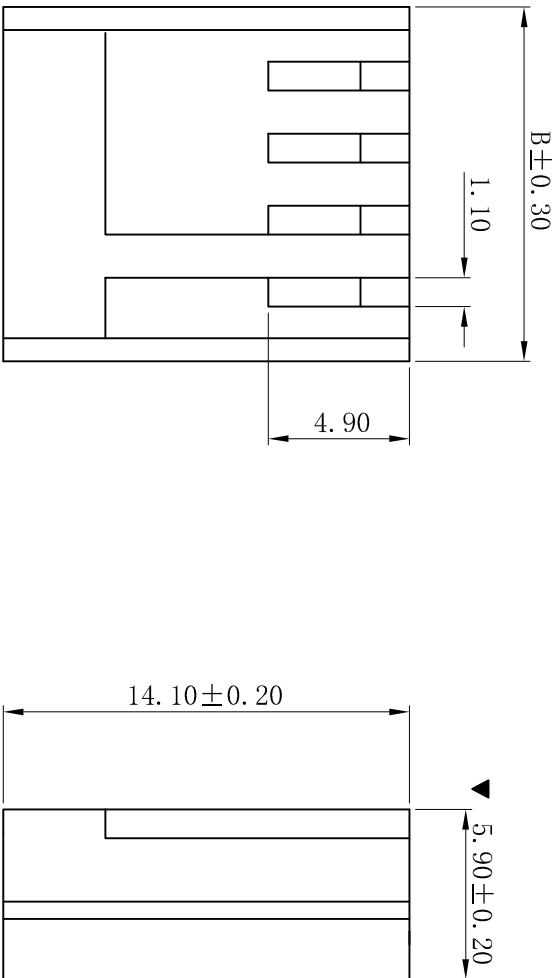


RoHS

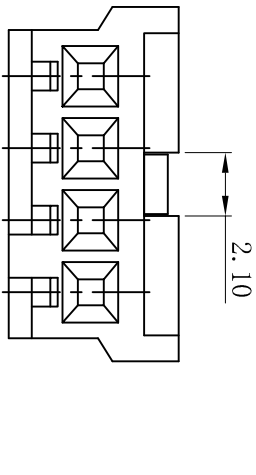

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C

HOUSING

- Part No. : H2540-NP
- Poles : 02-12P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	2.50	7.25
03	5.00	9.75
04	7.50	12.25
05	10.00	14.75
06	12.50	17.25
07	15.00	19.75
08	17.50	22.25
09	20.00	24.75
10	22.50	27.25
11	25.00	29.75
12	27.50	32.25

					一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		XYDZ® 东莞市祥运连接器有限公司 Dongguan Xiangyun Connectors CO.,Ltd				
</											