
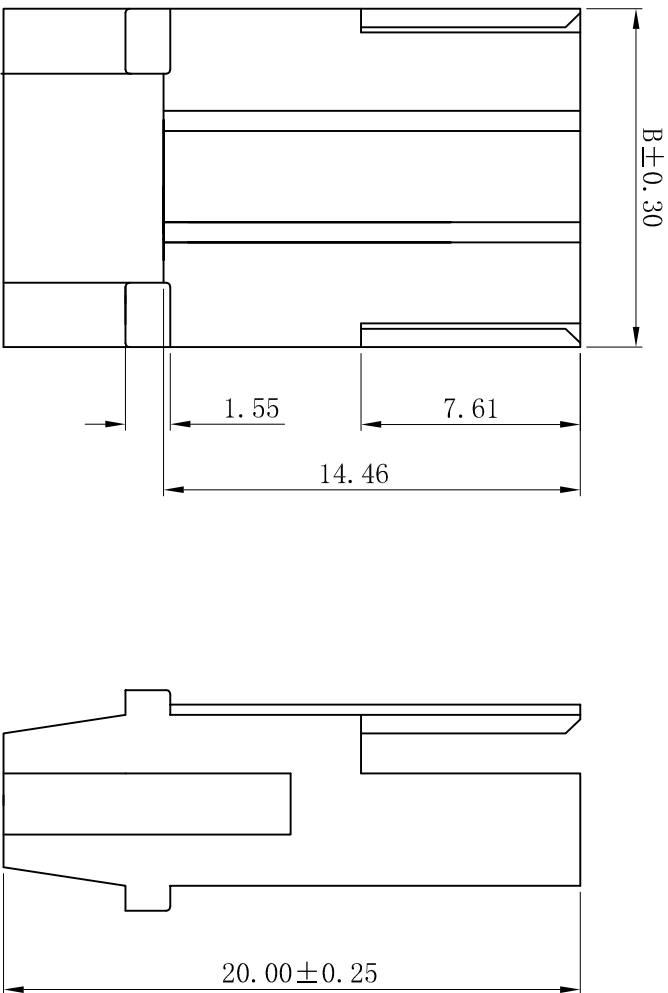


RoHS

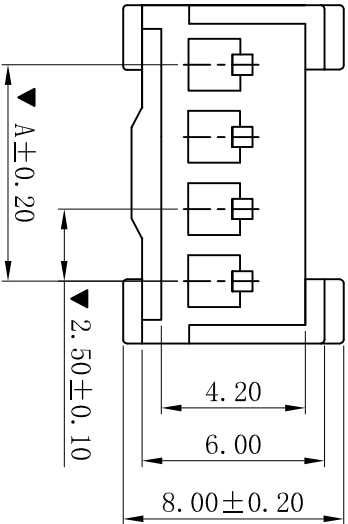

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C

HOUSING

- Part No. : H2541-NP
- Poles : 02-12P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	2.50	7.90
03	5.00	10.40
04	7.50	12.90
05	10.00	15.40
06	12.50	17.90
07	15.00	20.40
08	17.50	22.90
09	20.00	27.40
10	22.50	29.90
11	25.00	32.40
12	27.50	34.90

H					一般公差 GENERAL TOLERANCE: 0 ± 0.30 .0 ± 0.25 .00 ± 0.20 .000 ± 0.05 ANGLE: ± 1°
	D	更新图面	2019-06-03	陈雄军	
	C	修订版本	2015-11-04	陈雄军	
	B	变更图宽格式内容	2013-12-27	陈雄军	
H	A	新版本	2011-05-24	陈雄军	
	版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.	绘图/DR
					审核/CHECK
					核准/APPRO
					日期/DATE
					2019-06-03
					胡 进
					陈雄军

XYDZ® 东莞市祥运连接器有限公司					Dongguan XiangYun Connectors CO.,Ltd				
Connectors									
投影法 Projection					品 名 (PART NAME) AMP 2.50mm Female Housing Connector Series				
单位 Unit		MM							
比例/Scale		1:1							
大小/Size		A4							
页码/SHEET		1/1			料 号 (PART NO) H2541-04P				
版本/Rev		D							
					状态码 C				