
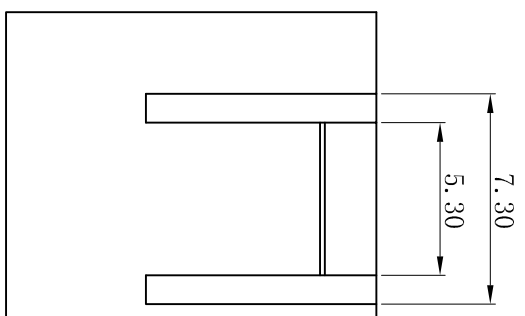
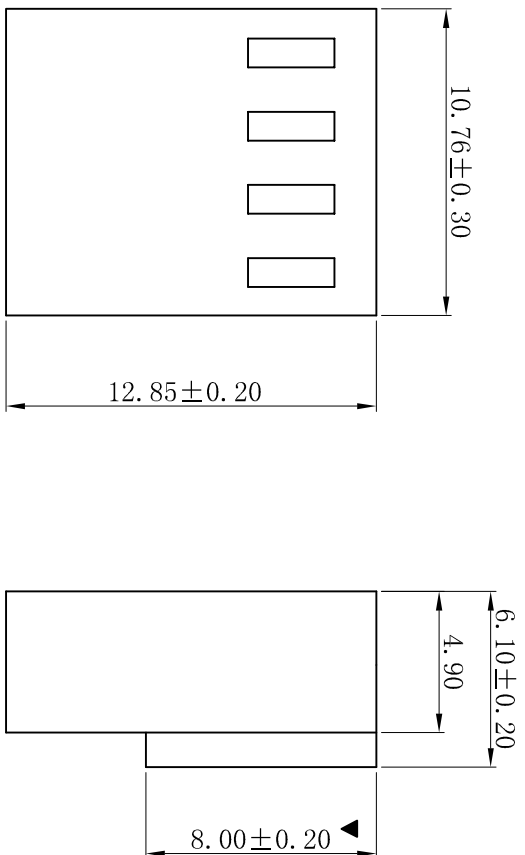


RoHS

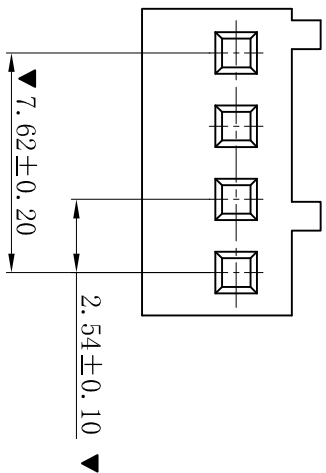

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H2542-04K3
- Housing Material: PA66 UL94V-2
- The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军	更新图面	2019-06-03	陈雄军	胡进	2019-06-03	2510 2.54mm Housing Connector Series	H2542-04K3	C
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容	2013-12-27	陈雄军	胡进	2019-06-03	2510 2.54mm Housing Connector Series	H2542-04K3	C
B	变更图宽格式内容	2013-12-27	陈雄军	新版本	2011-05-24	陈雄军	胡进	2019-06-03	2510 2.54mm Housing Connector Series	H2542-04K3	C
A	新版本	2011-05-24	陈雄军	说明	日期	承认	胡进	2019-06-03	2510 2.54mm Housing Connector Series	H2542-04K3	C
版次	说明	日期	承认	说明	日期	承认	胡进	2019-06-03	2510 2.54mm Housing Connector Series	H2542-04K3	C
REV.	DESCRIPTION	DATE	APPRO.	DESCRIPTION	DATE	APPRO.	胡进	2019-06-03	2510 2.54mm Housing Connector Series	H2542-04K3	C

XYDZ® 东莞市祥运连接器有限公司		Dongguan XiangYun Connectors CO., Ltd		投影法		品名		2510 2.54mm Housing Connector Series		状态码	
Connectors		Connectors		第一角法		(PART NAME)		2510 2.54mm Housing Connector Series		C	
一般公差		0±0.30		单位		MM		料号		H2542-04K3	
GENERAL TOLERANCE:		.00±0.25		比例/Scale		1:1		页码/SHEET		1/1	
		.000±0.05		大小/SIZE		A4		版本/Rev		D	
ANGLE: ±1°				审核/CHECK		陈雄军					
				批准/APPRO		胡进					
				日期/DATE		2019-06-03					