
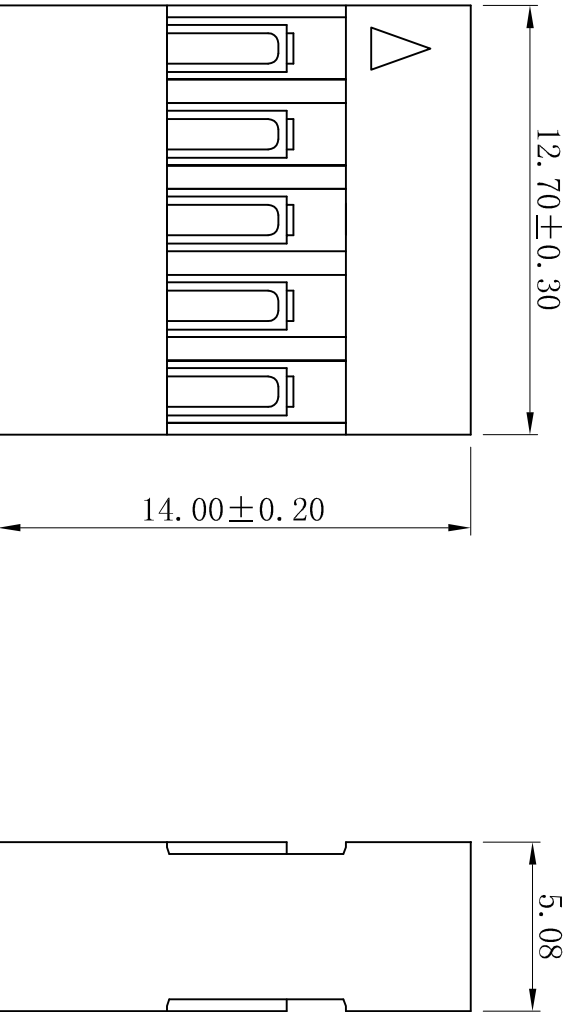



ROHS

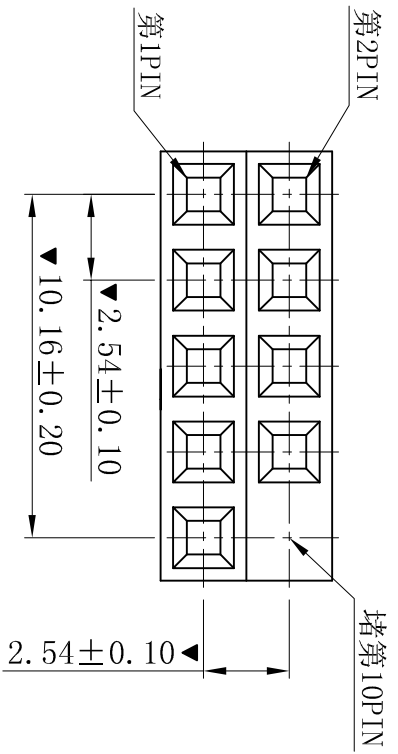

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C
- HOUSING
- Part No. : H2544-2x05P-BK-K10
 - Poles : 10P
 - Housing Material : PBT UL94V-0 Black
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd	
修订版本		2015-11-04	陈雄军	绘图/DR		ANGLE: ±1°	第一角法 First Angle		品名 (PART NAME)	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK			单位 Unit		杜邦 2.54mm Housing	
新版本		2011-05-24	陈雄军	批准/APPRO			比例/Scale		Connector Series	
说明		日期 DATE	承认 APPRO.	日期/DATE		胡进	大小/Size		料号 (PART NO)	
版次 REV.		1		日期/DATE		2019-06-03	页码/SHEET		H2544-2x05P-BK-K10	
DESCRIPTION		3		日期/DATE			版本/Rev		状态码	
		2					D		C	