
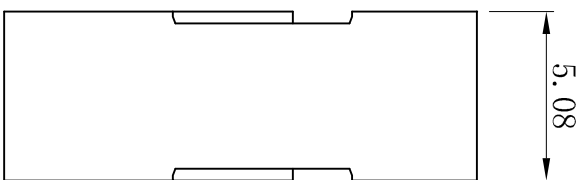


RoHS

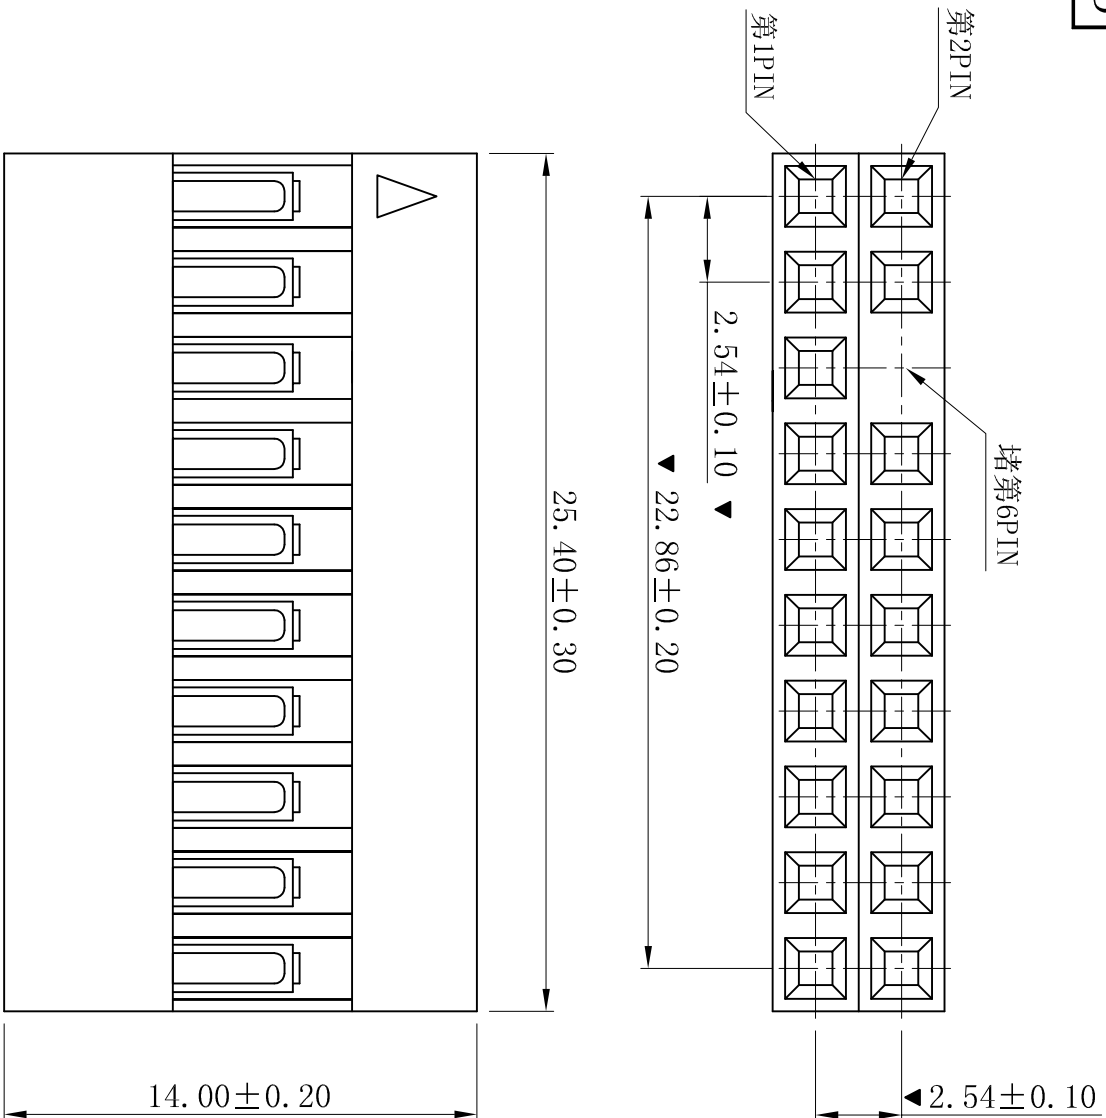

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H2544-2x10P-BK-K06
- Poles : 20P
- Housing Material: PBT UL94V-0 Black
- The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	PPT Design	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°	
C	修订版本	2015-11-04	陈雄军	绘图/DR	PPT Design	
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHK	陈雄军	
A	新版本	2011-05-24	陈雄军	核准/APPRO	胡进	
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE	2019-06-03

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>	
<p>投影法 Projection 单位 Unit MM</p>	<p>品名 (PART NAME) 杜邦 2.54mm Housing Connector Series</p>
<p>比例/Scale 大小/Size 1:1 A4 1/1</p>	<p>料号 (PART NO) H2544-2x10P-BK-K06</p>
<p>页码/SHEET 版本/Rev D</p>	<p>状态码 C</p>