
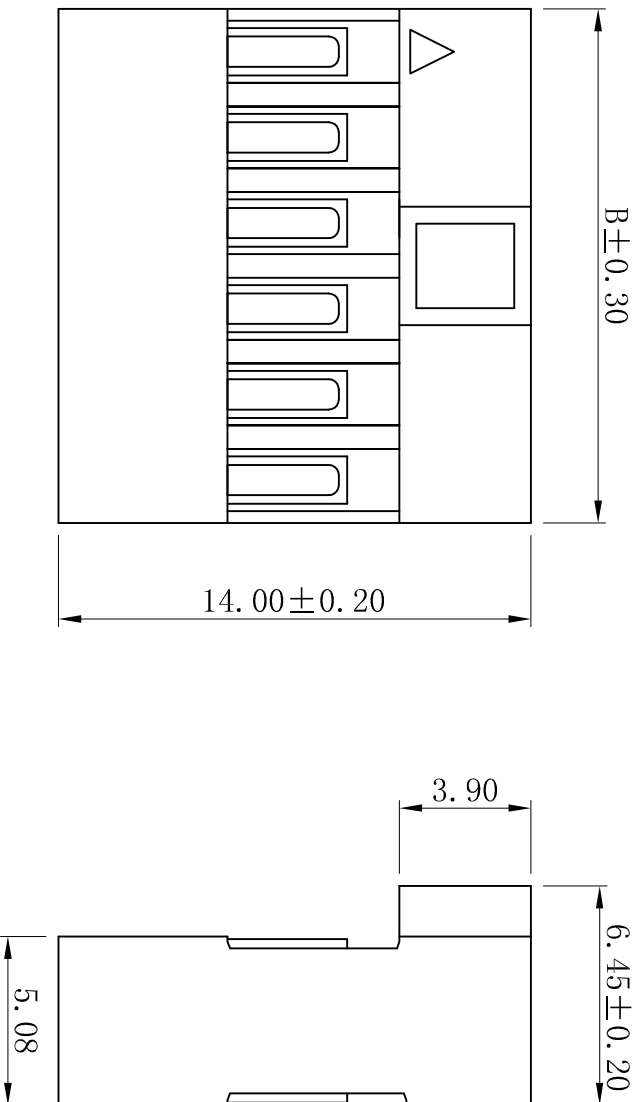
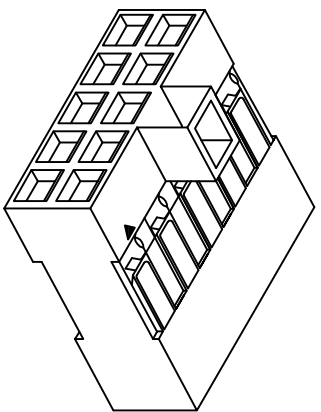


ROHS

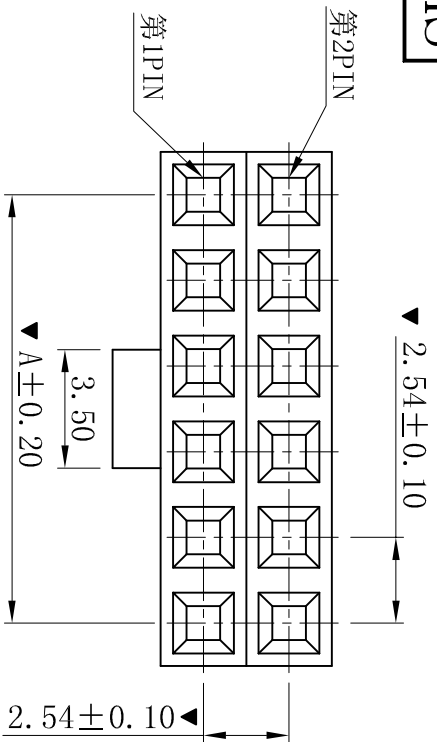

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C<sup>+</sup>+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H2544T-2xNP-X
- Poles : 04-80P
- Housing Material: PBT UL94V-0 Black
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		Poles	Dimension (mm)	
	A	B		A	B
2x01	---	---	2x21	50.80	53.34
2x02	2.54	5.08	2x22	53.34	55.88
2x03	5.08	7.62	2x23	55.88	58.42
2x04	7.62	10.16	2x24	58.42	60.96
2x05	10.16	12.70	2x25	60.96	63.50
2x06	12.70	15.24	2x26	63.50	66.04
2x07	15.24	17.78	2x27	66.04	68.58
2x08	17.78	20.32	2x28	68.58	71.12
2x09	20.32	22.86	2x29	71.12	73.66
2x10	22.86	25.40	2x30	73.66	76.20
2x11	25.40	27.94	2x31	76.20	78.74
2x12	27.94	30.48	2x32	78.74	81.28
2x13	30.48	33.02	2x33	81.28	83.82
2x14	33.02	35.56	2x34	83.82	86.36
2x15	35.56	38.10	2x35	86.36	88.90
2x16	38.10	40.64	2x36	88.90	91.44
2x17	40.64	43.18	2x37	91.44	93.98
2x18	43.18	45.72	2x38	93.98	96.52
2x19	45.72	48.26	2x39	96.52	99.06
2x20	48.26	50.80	2x40	99.06	101.60

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

更新图面	2019-06-03	陈雄军
修打版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE:	APPRO.

更新图面	2019-06-03	陈雄军
修打版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE:	APPRO.

投影法  
Projection

单位 Unit  
Unit

比例/Scale  
Scale

大小/Size  
Size

页码/Sheet  
Sheet

版本/Rev  
Rev

品名  
PART NAME

料号  
PART NO

杜邦 2.54mm 带凸 Housing  
Connector Series

H2544T-2xNP-X

状态码  
Status Code

C