


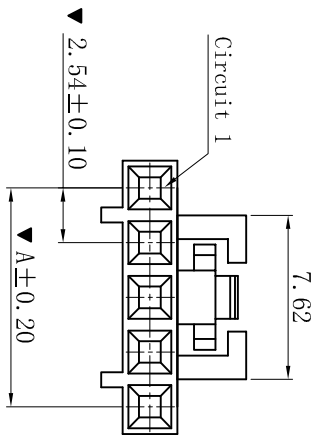


ROHS



02P



03P




LATCH AND POLARIZATION
RIB LOCATION

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C +85° C

■ HOUSING

- Part No. : H2545-NP
- Poles : 02-20P
- Housing Material: PA66 15%GF UL94V-0 Black
- The Dimension Marked “▼” Must Be Recorded

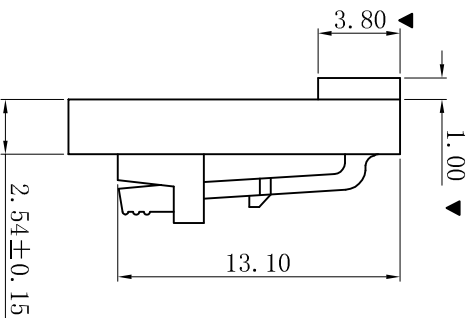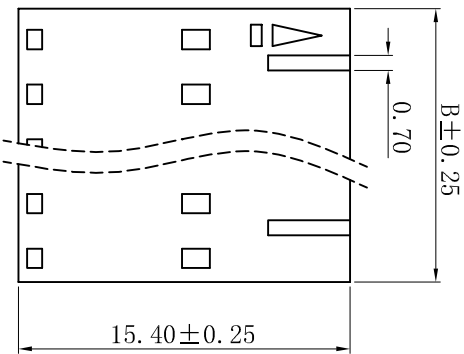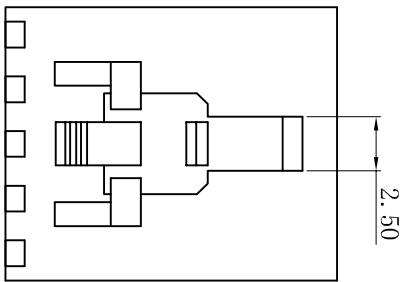

Poles Dimensions (mm)

Poles	Dimensions (mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	DESCRIPTION	APPRO.
2			
3			
4			
5			

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	

绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法	第一角	品名	Molex 2.54mm Male Housing
单位 Unit	MM	(PART NAME)	Connector Series
比例/Scale	1:1	料号	H2545-NP
大小/Size	A4	(PART NO)	
页码/SHEET	1/1	状态码	C
版本/Rev	D		