



RoHS

POLARIZATION SLOT LOCATION



02 Poles







03 Poles

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C

■ HOUSING

- Part No. : H2545M-NP
- Poles : 02-20P
- Housing Material: PA66 15%GF UL94V-0 Black
- The Dimension Marked “▼” Must Be Recorded

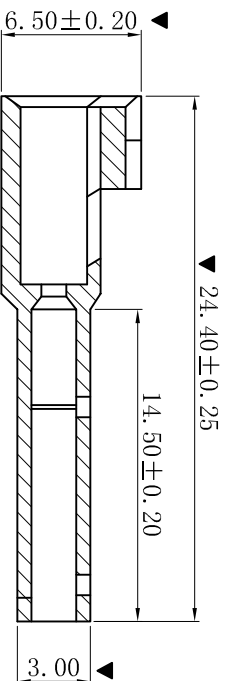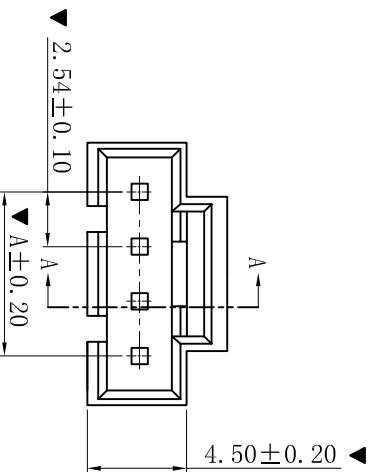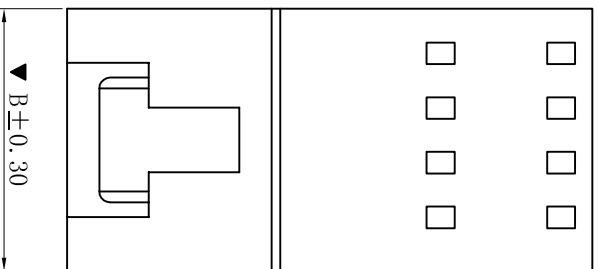

SECTION: A-A

Poles	Dimensions (mm)	
	A	B
02	2.54	7.12
03	5.08	9.66
04	7.62	12.20
05	10.16	14.74
06	12.70	17.28
07	15.24	19.82
08	17.78	22.36
09	20.32	24.90
10	22.86	27.44
11	25.40	29.98
12	27.94	32.52
13	30.48	35.06
14	33.02	37.60
15	35.56	40.14
16	38.10	42.68
17	40.64	45.22
18	43.18	47.76
19	45.72	50.30
20	48.26	52.84

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1 $^{\circ}$	

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE:	APPRO.

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE:	APPRO.

投影法
Projection

单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/Sheet
1/1

版本/Rev
D

品名
(PART NAME)

Molex 2.54mm Female Housing

料号
(PART NO)

H2545M-NP

料号
(PART NO)

H2545M-NP

状态码

C

状态码

C