
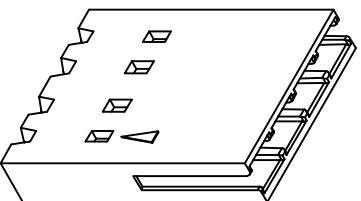
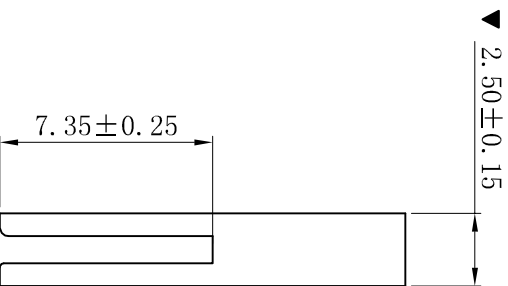
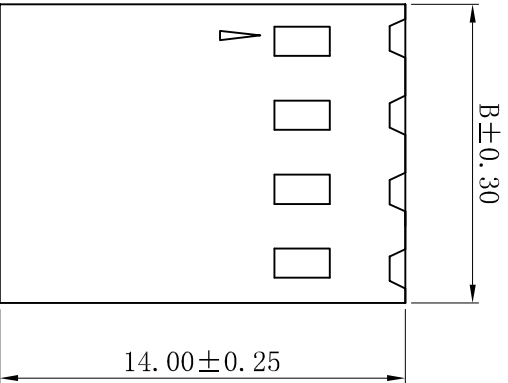



RoHS



- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance: 500MΩ min
  - Temperature range: -25° C +85° C
- HOUSING
- Part No. : H2545NH-NP
  - Poles : 02-20P
  - Housing Material: PBT UL94V-0+30%G.F Black
  - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

D	更新图面	2019-06-03	陈雄军
C	修订图面	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	DESCRPTION	DATE	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	

投影法	第一角	品名	Molex 2.54mm Housing
Connector's		(PART NAME)	Connector Series
单位 Unit	MM	料号	H2545NH-NP
比例/Scale	1:1	(PART NO)	
大小/Size	A4		
页码/SHEET	1/1		
版本/Rev	D		

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connector's CO., Ltd

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----