
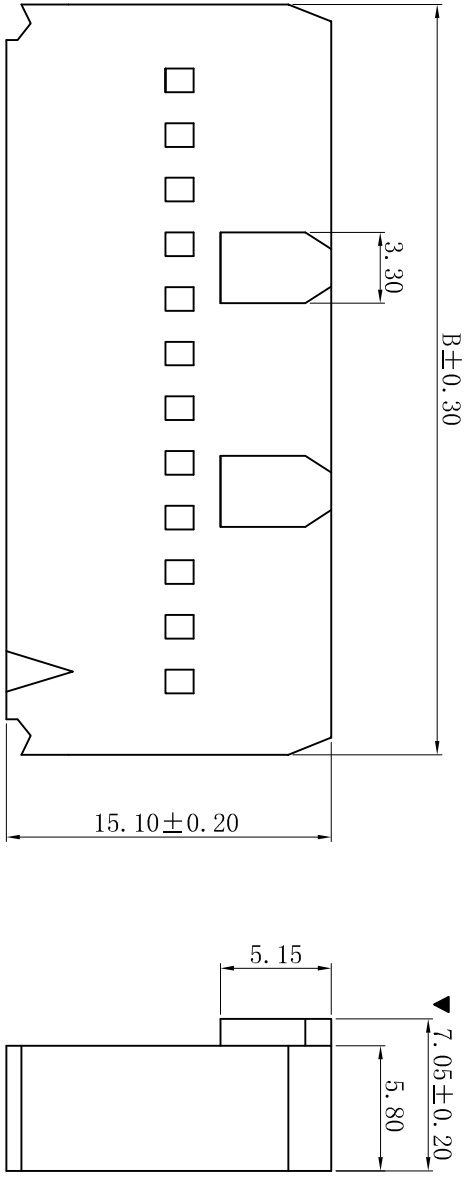


ROHS

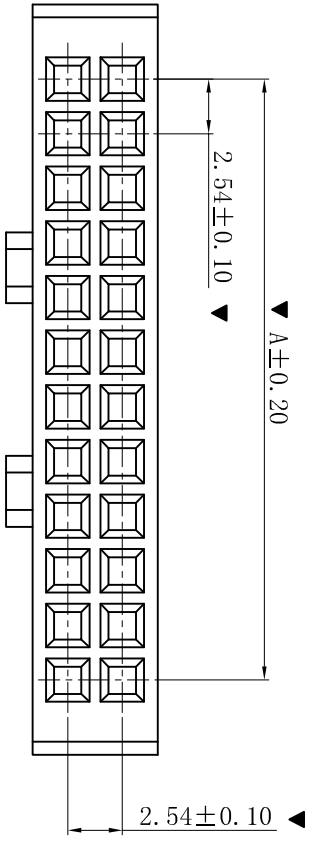

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C ~ +85° C

- HOUSING
- Part No. : H2547DT-2xNP
  - Poles : 04-80P
  - Housing Material : PBT UL94V-0
  - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions(mm)		Poles		Dimensions(mm)	
	A	B	A	B	A	B
2x02	2.54	9.68	2x18	43.18	50.32	
2x03	5.08	12.22	2x19	45.72	52.86	
2x04	7.62	14.76	2x20	48.26	55.40	
2x05	10.16	17.30	2x21	50.80	57.94	
2x06	12.70	19.84	2x22	53.34	60.48	
2x07	15.24	22.38	2x23	55.88	63.02	
2x08	17.78	24.92	2x24	58.42	65.56	
2x09	20.32	27.46	2x25	60.96	68.10	
2x10	22.86	30.00	2x26	63.50	70.64	
2x11	25.40	32.54	2x27	66.04	73.18	
2x12	27.94	35.08	2x28	68.58	75.72	
2x13	30.48	37.62	2x29	71.12	78.26	
2x14	33.02	40.16	2x30	73.66	80.80	
2x15	35.56	42.70	2x31	76.20	83.34	
2x16	38.10	45.24	2x32	78.74	85.88	
2x17	40.64	47.78	2x40	99.06	106.20	

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D
品名 (PART NAME)	HRS 2.54mm Housing Connector Series
料号 (PART NO)	H2547DT-2xNP
状态码	C

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ±0.30 ±0.25 ±0.20 ±0.15 ±0.10 ±0.05 ANGLE: ±1°
修訂版本		2015-11-04	陈雄军	
变更图宽格式内容		2013-12-27	陈雄军	
新版本		2011-05-24	陈雄军	
说明 DESCRIPTION		日期 DATE	承认 APPRO.	