


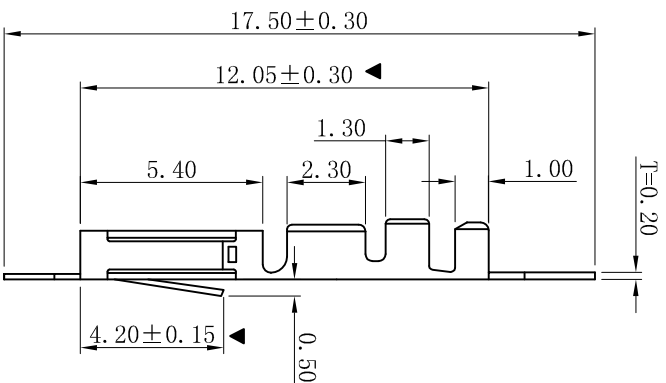



RoHS

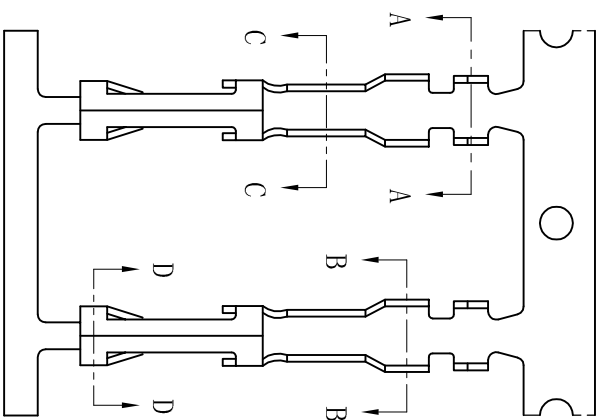


SECTION: A-A



SECTION: B-B



SECTION: C-C



SECTION: D-D

- SPECIFICATIONS
 - Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- TERMINAL
 - Part No.: T2543PT-B
 - Applicable wire: AWG#22-#26
 - Material: Phosphor Bronze
 - Finish: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容
B	新版本	2013-12-27	陈雄军	新版本
A	说明	2011-05-24	陈雄军	说明
1	版次			
1	REV.			

一般公差	0±0.30	绘图/DR 审核/CHECK 批准/APPRO 日期/DATE 2019-06-03
GENERAL TOLERANCE:	.00±0.25	
	.000±0.15	
ANGLE: ±1°		

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影	品名 (PART NAME)	AMP 2.54mm Female Terminal Connector Series
单位 Unit	MM	料号 (PART NO)	T2543PT-B
比例/Scale	1:1	状态码	C
大小/SIZE	A4		
页码/SHEET	1/1		
版本/Rev	D		