RoHS

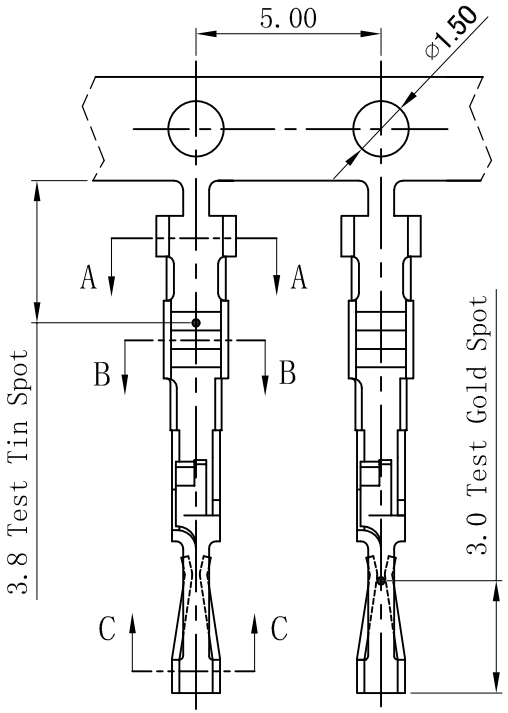

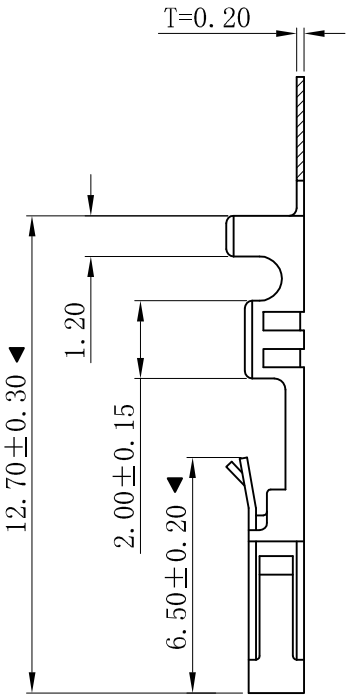

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ TERMINAL

- Part No.: T2545PG
- Applicable wire: AWG#22-#26
- Material: Phosphor Bronze
- Finish;
  Contact area: Gold-Plated
  Rivet Line area: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded



SECTION: A-A



SECTION: B-B



SECTION: C-C

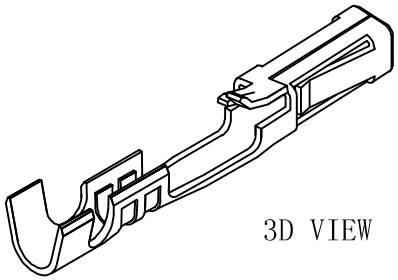

3D VIEW

REV.	DESCRIPTION	DATE.	APPRO.
B	更新图面	2019-06-03	PH.Duan
A	新版本	2018-09-19	PH.Duan

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°		
绘图/DR	PH.Duan	投影法 Projection	
审核/CHECK	陈雄军	单位 Unit	MM
核准/APPRO	胡 进	比例/Scale	1:1
日期/DATE	2019-06-03	大小/SIZE	A4
		页码/SHEET	1/1
		版本/Rev	B

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

品 名 (PART NEME)	Molex 2.54mm Female Terminal Connector Series		
料 号 (PART NO)	T2545PG	状态码	C