
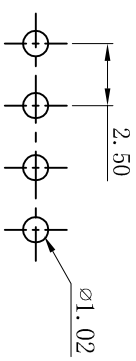
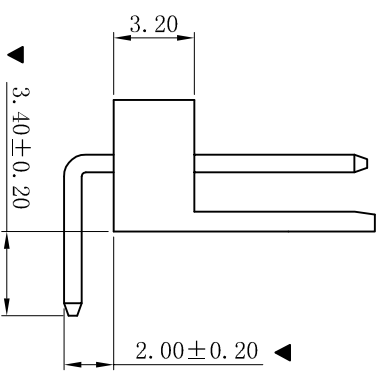
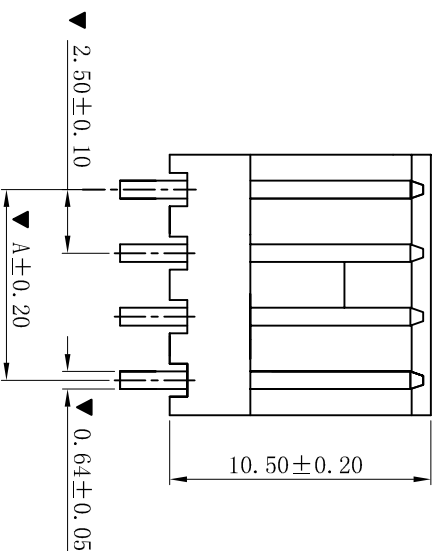


RoHS



P. C. B LAYOUT

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

WAFER

- Part No. : W2540R-NP
- Poles : 02-12P
- Housing Material : PA66 UL94V-0
- Pin Material : Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B

02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00

					一般公差 GENERAL TOLERANCE: 0±0.30 ±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO.,Ltd				
		更新图面	2019-06-03	陈雄军	绘图/DR	陈雄军	投影法 Projection 	单位 Unit MM	品 名 (PART NAME) AMP 2.50mm 90° Wafer Connector Series		
D											
		修订版本	2015-11-04	陈雄军	审核/CHECK	陈雄军	比例/Scale	1:1	料 号 (PART NO) W2540R-NP		状态码 C
C		变更图宽格式内容	2013-12-27	陈雄军	核准/APPRO	胡 进	大小/Size	A4			
		新版本	2011-05-24	陈雄军	日期/DATE	2019-06-03	页码/SHEET	1/1			
		说明	日期	承认	日期/DATE		版本/Rev	D			
		版次 REV.	DESCRIPTION	DATE.	APPRO.						
H											H